HATTELAND®
DISPLAY

USER MANUAL

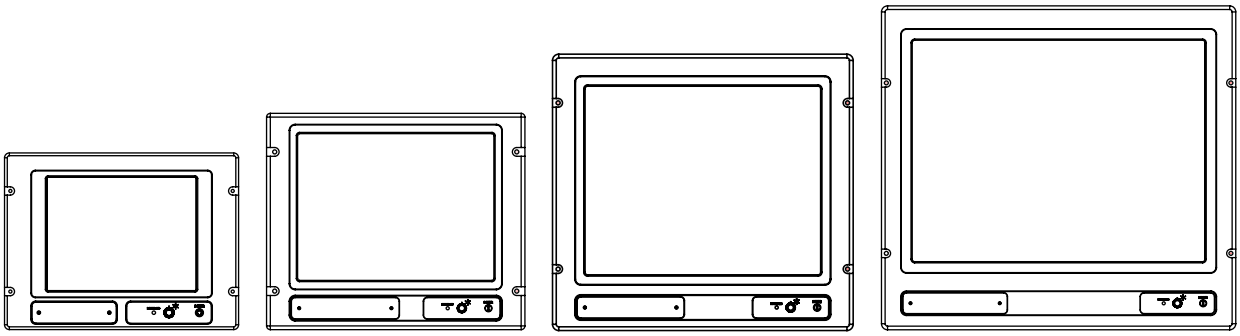

Maritime Multi Computer Models

JH 10T08 MMC - 10,4 inch Maritime Multi Computer
JH 15T05 MMC - 15,0 inch Maritime Multi Computer
JH 19T02 MMC - 19,0 inch Maritime Multi Computer
JH 23T02 MMC - 23,1 inch Maritime Multi Computer

User Manual MMC (ETX)	
Updated: 07 May 2009	Doc Id: INB100014-1 (Rev 27)
For models: -A1, -A2, -C1, -C2, -E1, -E2	Slim User Manual

Please visit www.hatteland-display.com for the latest electronic version of this manual.

Hatteland Display AS, Åmsosen, N-5578 Nedre Vats, Norway
Tel: (+47) 5276 3700 - Fax: (+47) 5276 5444 - info@hatteland-display.com - www.hatteland-display.com

Copyright © 2009 Hatteland Display AS
Aamsosen, N-5578 Nedre Vats, Norway

Information in this manual is copyrighted to the respective owners. All rights are reserved by Hatteland Display AS. This information may not, in whole or in part, be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine-readable form without the prior written consent of Hatteland Display AS.

The products described, or referenced, herein are copyrighted to the respective owners. The products may not be copied or duplicated in any way. This documentation contains proprietary information that is not to be disclosed to persons outside the user's company without prior written consent of Hatteland Display AS.

The copyright notice appearing above is included to provide statutory protection in the event of unauthorized or unintentional public disclosure.

All other product names or trademarks are properties of their respective owners !

WARNING: This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Contents

Contents 3
Contents of package 5

General 7
About Hatteland Display 8
Contact Information 8
About this manual 8
Basic Construction - Maritime Multi Computers 9
Product Labeling (examples) 10
Serial Number Label and Location 10
Warranty Label 10
Touch screen products 11
Touch screen Technology & Label markings 12

Installation 13
Installation and mounting 14
Brightness knob precaution 14
Ergonomics 15
Cables 16
Cable Entries & Connectors (Marked area) - Illustration only 16
Maximum Cable Length 17
Standard Bracket 17
Physical Connections - MMC based models 18

Operation 21
User Controls 22

Specifications 23
Specifications - JH 10T08 MMC 24
Specifications - JH 15T05 MMC 25
Specifications - JH 19T02 MMC 26
Specifications - JH 23T02 MMC 27

Contents

Technical Drawings 29

Technical Drawings - JH 10T08 MMC 30

Standard Version 30

Technical Drawings - JH 15T05 MMC 31

Standard Version 31

Bracket Version 32

Technical Drawings - JH 19T02 MMC 33

Standard Version 33

Bracket Version 34

Technical Drawings - JH 23T02 MMC 35

Standard Version 35

Bracket Version 36

Technical Drawings - Accessories 37

MMC Bracket Assembly 38

19 Inch Bracket 39

10” Sun Visor 40

15” Sun Visor 41

19” Sun Visor 42

23” Sun Visor 43

15” TFT to 19” RACK Adapter 44

15” TFT to 17” CRT Adapter 45

19” TFT to 21” CRT Adapter 46

Appendixes 47

Pin Assignments - Common Connectors 48

Basic Trouble-shooting 51

Declaration of Conformity 52

Return Of Goods Information 53

Terms 54

Pixel Defect Policy 56

Notes 57

General Notes: (For all products) 57

Note for ECDIS Systems 57

Note for Documentation CD-ROM 57

Important BIOS Reset / No picture information 58

Revision History 59

Contents of package

This product is shipped with:

Item	Description	Illustration
	4 pcs of PAN M6X25 black bolts with M6 plastic washer. **These should only be used to secure the unit into a console.** *Note: If you prefer your own bolts, make sure they are minimum M6 and 25mm in length for security reasons.*	
	Documentation/Drivers/Software CD(s) for factory installed components like mainboard, IDE, network etc.	
	1 pcs of power cable European Type F “Schuko” to IEC. Length 1.8m *Note: Power cable not included with the DC model.*	EUR TYPE F 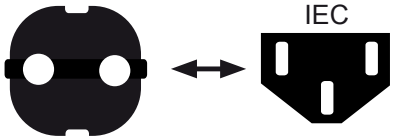 IEC
	1 pcs of power cable US Type B plug to IEC. Length 1.8m *Note: Power cable not included with the DC model.*	US TYPE B 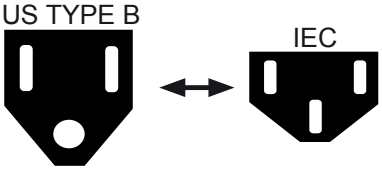 IEC
	1 pcs of User Manual (Slim version) **Note**: The separate documentation for third party components may be available on attached CD. The printed manual only covers specific information for HATTELAND® products, and not third party components.	
	1 pcs of configuration, test report and checklist sheets.	

Package may also include:

Item	Description	Illustration
	Bracket mounting kit: (Delivered only with optional bracket) 4 pcs of RenCol Tristar Knob Male - M6X10 mm 4 pcs of MicroPlastic - 6 mm Nylon washer. 4 pcs of Bolt with shoulder washer - M6X1X20 4 pcs of Flat washer	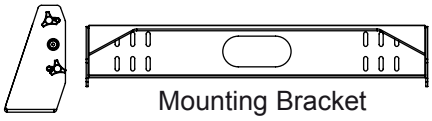 Mounting Bracket
	1 pcs of Touch Screen Driver CD. This CD is only included in the package if the unit was delivered with a factory mounted touch screen.	

This page left intentionally blank

General

KNOWLEDGE - QUALITY - VALUE

About Hatteland Display

Hatteland Display is the leading technology provider of maritime display and computer products. We deliver high quality, unique and customized solutions to the international maritime market.

The company represents innovation and quality to the system integrators world wide. Effective quality assurance and investment in sophisticated in-house manufacturing methods and facilities enable us to deliver type approved and Mil tested high quality products.

Our customer oriented approach, technical knowledge and dedication to R&D, makes us a trusted and preferred supplier of approved solutions, which are backed up by a strong service network.

Contact Information

Head office, Vats / Norway: Hatteland Display AS Åmsosen N-5578 Nedre Vats, Norway Tel: +47 5276 3700 Fax: +47 5276 5444 info@hatteland-display.com	**Sales office, Frankfurt / Germany:** Hatteland Display GmbH Werner Heisenberg Strasse 12, D-63263 Neu-Isenburg, Germany Tel: +49 6102 370 954 Fax: +49 6102 370 968
Sales office, Oslo / Norway: Hatteland Display AS Gjerdrums vei 12 N-0484 Oslo, Norway Tel: +47 5276 3700 Fax: +47 2258 6790	**Sales office, Aix-en-Provence / France:** Hatteland Display SAS 31 Parc du Golf, 350, Avenue JRGG de la Lauzière - CS 90519 13593 Aix-en-Provence Cedex 3, France Tel: +33 (0)4 42 16 35 15 Fax: +33 (0)4 42 16 35 09
Sales office, Tønsberg / Norway: Hatteland Display AS Narverødveien 40 N-3113 Tønsberg, Norway Tel: +47 5276 3700 Fax: +47 3335 7049	**Sales office, San Diego / USA:** Hatteland Display Inc. 11440 W. Bernardo Court, Suite 300 San Diego, CA 92127, USA Tel: +1 858 753 1959 Fax: +1 858 430 2461

About this manual

The manual contains electrical, mechanical and input/output signal specifications. All specifications in this manual, due to manufacturing, new revisions and approvals, are subject to change without notice. However, the last update and revision of this manual are shown both on the frontpage and also in the “Revision History” chapter. Please use that as a reference.

Furthermore, for third party datasheet and user manuals, please see dedicated interactive CD (where included) delivered with the product or contact our sales personnel for support. Please see the Contents Of Package chapter in the beginning of this manual to determine if a dedicated manual CD is included.

Basic Construction
Maritime Multi Computers

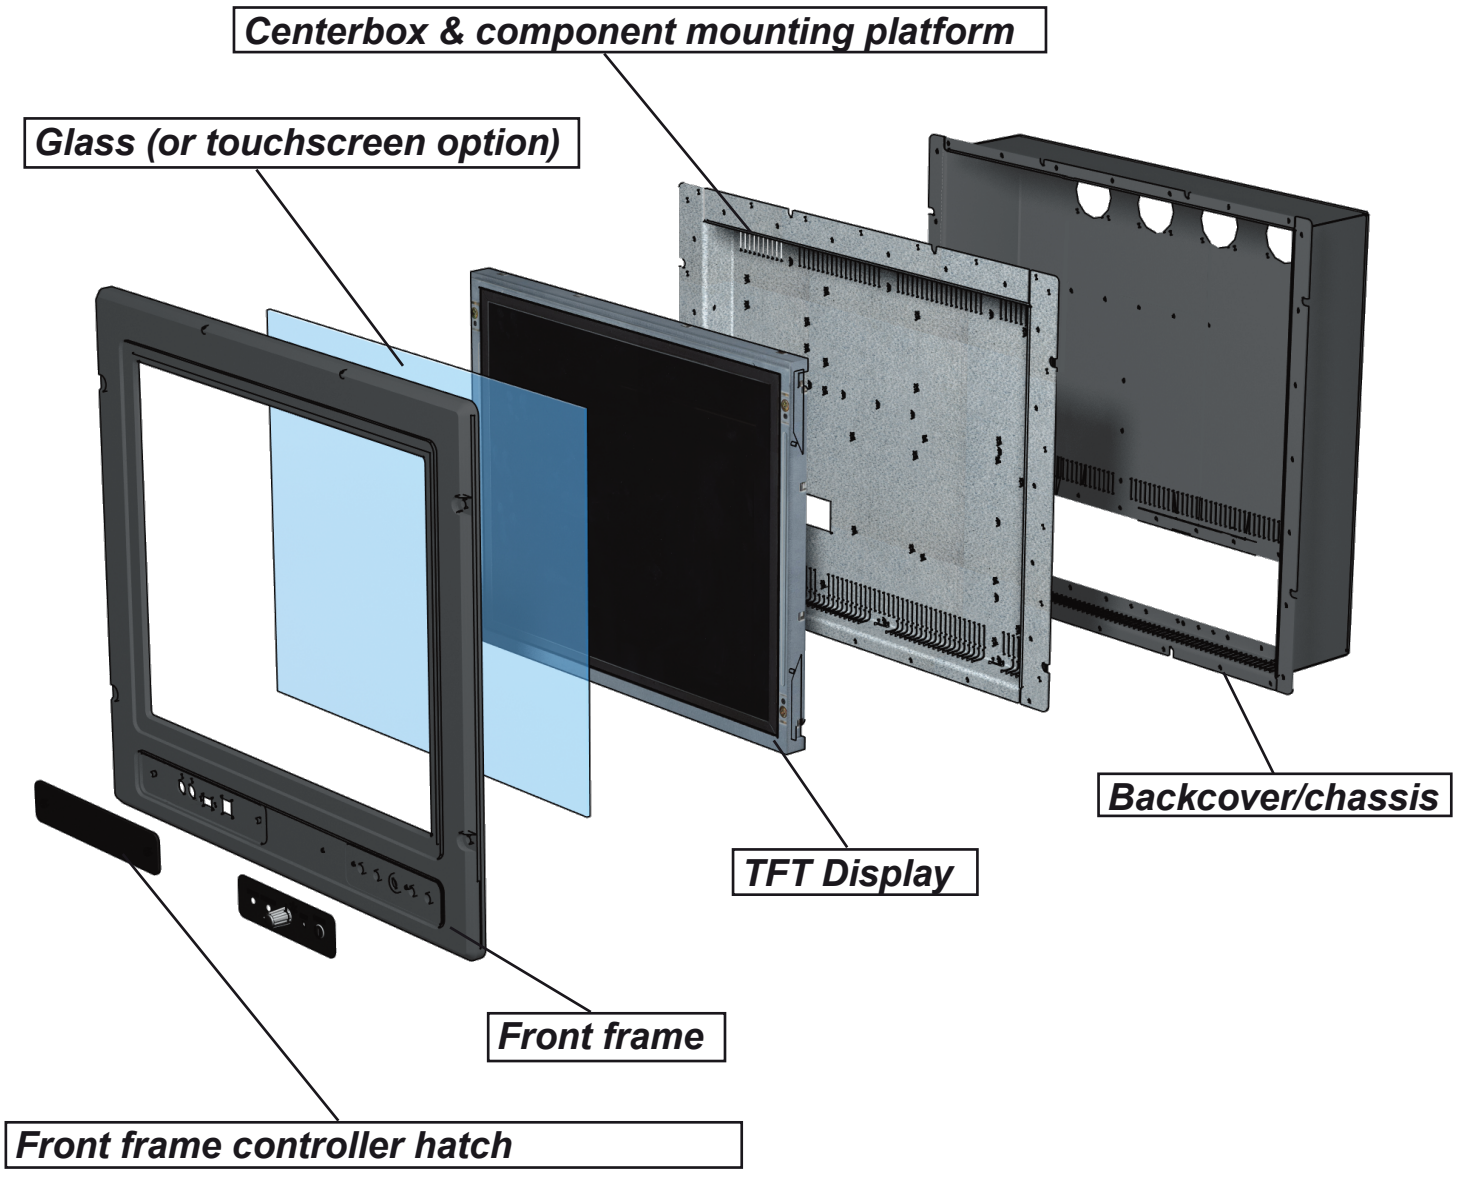

Illustration

Product Labeling (examples)

Serial Number Label and Location

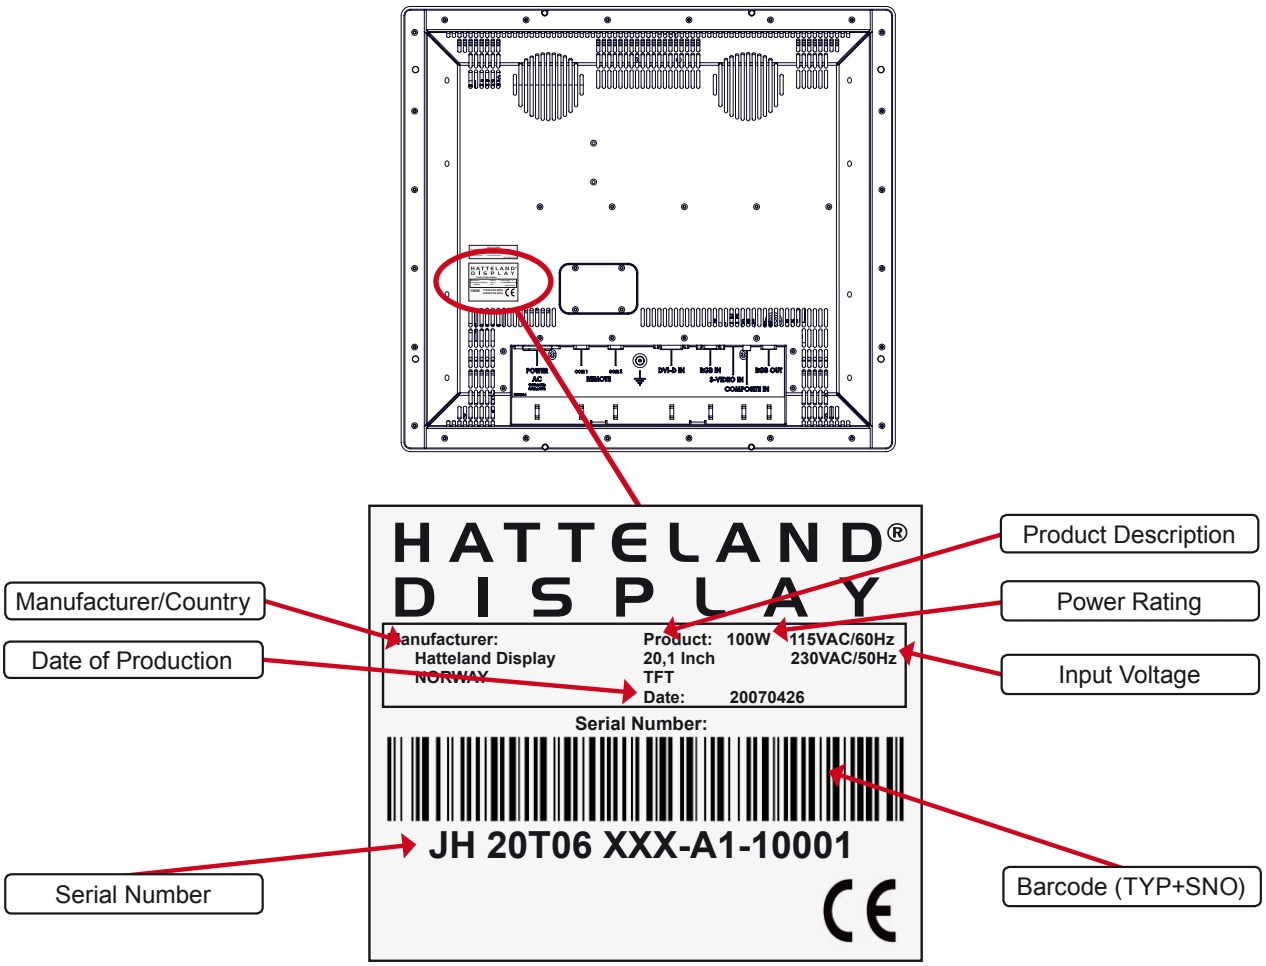

Product Type and Serial Number

Please note that S/N now reflects Hardware Code (HWCODE). S/N with 3-digits indicate pre-HW01 model, while S/N with 5-digits indicate HW01 model. For more information regarding HW01, please review own chapter in this manual. This only applies for Maritime Multi Display based products.

```
AA XXAXX AAA-AX-XXXXX   NOMENCLATURE - A=Letters, X=Numbers
JH 20T06 MMD-A1-10001   Example
|| ||||| ||| || |||||
|| ||||| ||| || ¤----   Serial Number, Either xxx or 1xxxx (HWcode indication)
|| ||||| ||| ¤¤------   Hardware Sub Version (AC=x1 / DC=x2 / Cx=Touch / Ex=ECDIS)
|| ||||| ¤¤¤---------   Standard Term ID or customized Term ID. Like MMD or MIL
|| |||¤¤------------    Hardware/PCB Electronics Version ID
|| ||¤---------------   TFT (Thin Film Transistor)
|| ¤¤----------------   Display Size (inch)
¤¤------------------   Manufacturer ID / Product Series ID
```

Warranty Label

If you are to perform service on a unit still under warranty, any warranty will be void if this label show signs of removal attempts (re-gluing) or removed completely. This label is located on the back of the product and covers a key screw. This is to aid service departments to determine if there has been any unauthorized service on a unit still under warranty.

Touch screen products

Introduction to products with touch screen
Both Resistive and Capacitive touch screen solutions are used for our products. Please review specifications found in this manual or our website (www.hatteland-display.com) to find your exact type number and then determine if it uses Resistive or Capacitive.

Capacitive Touch screen
The glass overlay has a coating that stores the charge deposited over its surface electrically. It will not operate with either a gloved hand or with a mechanical stylus. Capacitive touch screens operate by applying a small amount of voltage to each corner of the touch screen. When the screen is touched by a human finger it draws a minute amount of current to the X,Y point of contact. This location is calculated by the touch screen controller and transmitted back to the computer connected to the touch screen controller.

CAPACITIVE - Brief Specifications

Subject	Details
Construction	**Top:** ClearTek protective overcoat protects the sensors and increase durability. **Inside:** Electrode X/Y grid pattern and conductive coating. **Bottom:** Glass and conductive coating. Small amount of voltage is applied to the four corners for measuring X and Y coordinates of the touch point.
Positional Accurancy	Reported touch coordinates are within 1.0% of true position. (Based on viewing area dimensions)
Touch Contact Requirements	3 ms for finger input.
Enduarance Tested	More than 225 million touches in one location without noticable degradation to the surface.
Cleaning	Water, isopropyl, alcohol, and similar non-abrasive cleaners.
Liquid Resistance	Liquids on screen does not impede touchscreen performance.
Light Transmission	Up to 88% at 550 nm; dependant on specific surface finish chosen.

Resistive Touch screen
It generally uses a display overlay composed of layers, each with a conductive coating on the interior surface. Special separator “dots” are distributed evenly across the active area and separate the conductive interior layers. The pressure from using either a mechanical stylus or finger produces an internal electrical contact at the “action point” which supplies the controller with vertical and horizontal analog voltages for data input. The resistive touch screens are anti-glare to reduce reflective shine intensity, which will slightly diffuse the light output throughout the screen. Resistive technology activation can be initiated by; a gloved hand, fingernail, mechanical stylus or an ungloved finger.

RESISTIVE - Brief Specifications

Subject	Details
Construction	**Top:** Polyester with outside hard-surface coating with clear or anti-glare finish. **Inside:** Transparent conductive coating. **Bottom:** Glass substrate with uniform conductive coating. Top and bottom layers separated by separator dots.
Positional Accurancy	Standard deviation of error is less than +- 0.080-inch (2mm).
Touch Activation Force	Typically 57 to 133 g
Expected Life Performance	More than 35 million touches in one location without failure, using a stylus similar to a finger.
Cleaning	Water, isopropyl, alcohol, and similar non-abrasive cleaners.
Chemical Resistance (Exposed for one hour)	Acetone, Common food and beverages, Hexane, Isopropyl alcohol, Methylene chloride, Methyl ethyl ketone, Mineral spirits, Turpentine
Light Transmission	Typically 75% over visible light spectrum.

Touch screen products

Touch screen Technology & Label markings
Information about the factory mounted touch screen and what driver to use, are indicated on the dedicated label on your actual product. The information and location of the label can vary depending on product, this page only decribes the concept.

(This label is attached on products produced after September 2006)

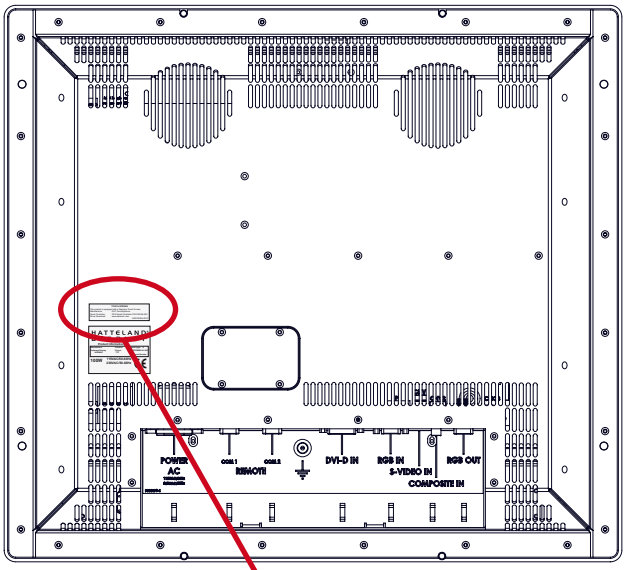

TOUCH SCREEN
This product is equipped with a Resistive Touch Screen:
Manufacturer : ELO TouchSystems
Touch Controller : 2210 Serial Controller P/N 055165-000
Driver Download : www.elotouch.com
VSD100564-2210

Example label only

Up-2-date touch screen drivers and documentation:
Touch Screen based products are shipped with a Touch Screen Driver Wizard CD with suitable drivers (menu snapshot shown to the right).

You can also visit our website www.hatteland-display.com to view the same list (or even recently new added products) of our models with touch screen. Before using the touch screen, it should be calibrated for your system. Please install the 3rd party software and use the Calibrate function from there.

For additional touch controller/screen documentation and possible updated drivers, please visit the 3rd party manufacturer site as found in the Touch Screen Wizard CD menu.

Installation

General Installation Recommendations

Installation and mounting

1. Most of our products are intended for various methods of installation or mounting (panel mounting, bracket mounting, ceiling/wall mounting etc.); for details, please see the relevant mechanical drawings.

2. Adequate ventilation is a necessary prerequisite for the life of the product. The air inlet and outlet openings must definitely be kept clear; coverings which restrict ventilation are not permissible.

3. Do not install the unit in a horizontal position (laying down), as this will cause heat to build up inside the display which will damage the LCD Panel. To prevent this problem we recommend installing the unit in a vertical position (±30 degrees) to improve the airflow through the unit.

4. Exposure to direct sunlight can cause a considerable increase in the temperature of the unit, and might under certain circumstances lead to overtemperature. This point should already be taken into consideration when the bridge equipment is being planned (sun shades, distance from the windows, ventilation, etc.)

5. Space necessary for ventilation, for cable inlets, for the operating procedures and for maintenance, must be provided.

6. To further improve the cooling of the unit we recommend installing Cooling Fans underneath blowing upwards into the unit air inlet. This may be required in high temperature applications and also when there is reason to expect temperature problems due to non-optimal way of mounting(Ref.2-5).

7. If the push buttons of the product are not illuminated, an external, dimmable illumination (IEC 60945 Ed. 4, 4.2.2.3, e.g. Goose neck light) is required for navigational use. The illumination shall be dazzle-free and adjustable to extinction.

8. Information about necessary pull-relievers for cables is given in the installation drawings. Attention must be paid to this information so that cable breaks will not occur, e.g. during service work.

Brightness knob precaution

Please be aware of the risk of breaking or bending the brightness knob. The brightness knob should be free of any obstruction.

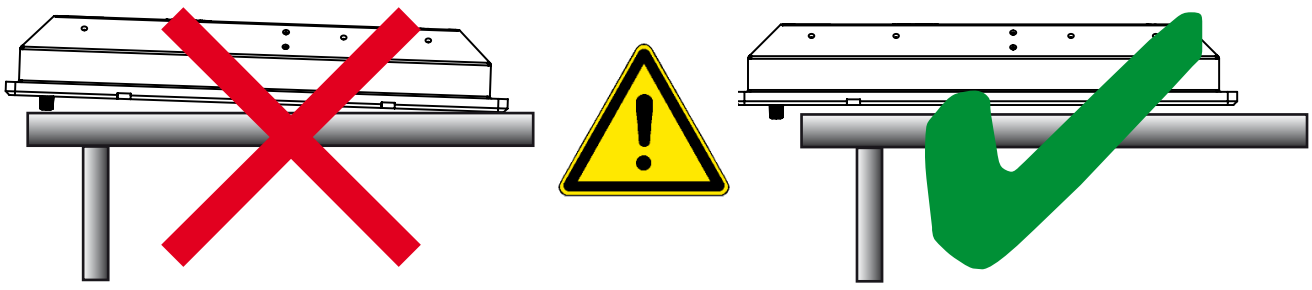

General Installation Recommendations

Ergonomics

1. Adjust the unit height so that the top of the screen is at or below eye level. Your eyes should look slightly downwards when viewing the middle of the screen.
2. Adjust screen inclination to remain gaze angle to the centre of the screen approximately perpendicular to the line of gaze.

3. When products are to be operated both from a sitting position and from a standing position, a screen inclination of about 30° to 40° (from a vertical plane) has turned out to be favourable.

4. The brightness of displays is limited. Sunlight passing directly through the bridge windows - or its reflection - which falls upon the screen workplaces must be reduced by suitable means (negatively inclined window surfaces, Venetian blinds, distance from the windows, dark colouring of the deckhead)

5. Units in the bridge wing area must be installed or mounted by suitable alignment or bulkhead/ deckhead mounting in such a way that reflections of light from the front pane of the display are not directed into the observer's viewing direction.

6. The use of ordinary commercial filter plates or filter films is not permitted for items of equipment that require approval (by optical effects, "aids" of that kind can suppress small radar targets, for example).

General mounting instructions

- The useful life of the components of all Electronics Units generally decreases with increasing ambient temperature; it is therefore advisable to install such units in air-conditioned rooms. If there are no such facilities these rooms must at least be dry, adequately ventilated and kept at a suitable temperature in order to prevent the formation of condensation inside the display unit.

- With most Electronic Units, cooling takes place via the surface of the casing. The cooling must not be impaired by partial covering of the unit or by installation of the unit in a confined cabinet.

- In the area of the wheel house, the distance of each electronics unit from the magnetic standard compass or the magnetic steering compass must not be less than the permitted magnetic protection distance.

This distance is measured from the centre of the magnetic system of the compass to the nearest point on the corresponding unit concerned.

- Units which are to be used on the bridge wing must be installed inside the "wing control console" protected against the weather. In order to avoid misting of the viewing screen, a 25 ... 50 W console-heating (power depending on the volume) is recommended.

- When selecting the site of a display unit, the maximum cable lengths have to be considered.

- The impairment of read-out from a display screen by direct light from lamps or the sun must be avoided. Rear windows must be blacked out by means of roller blinds or Venetian blinds.

General Installation Recommendations

- Disturbing reflections on the screen of a display caused by pilot lamps and illuminated signs must be prevented by suitable measures (screening or relocating).
- When a product is being installed, the surface base or bulkhead must be checked to ensure that it is flat in order to avoid twisting of the unit when the fixing screws are tightened, because such twisting would impair mechanical functions. Any unevenness should be compensated for by means of spacing-washers.

- The grounding screws of the units must be connected to the body of the ship (ground); the wire used should have a cross sectional area of at least 6 mm^2.

- Transportation damage, even if apparently insignificant at first glance, must immediately be examined and be reported to the freight carrier. The moment of setting-to-work of the equipment is too late, not only for reporting the damage but also for the supply of replacements.

Cables

Use only high quality shielded signal cables. For RGB/DVI cables use only cables with separate coax for Red, Green and Blue.

Cable Entries & Connectors (Marked area) - Illustration only

Bottom View

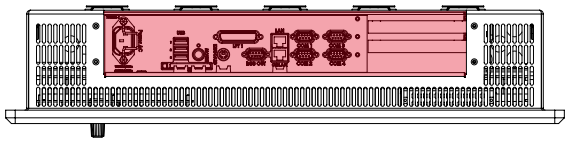

Back View

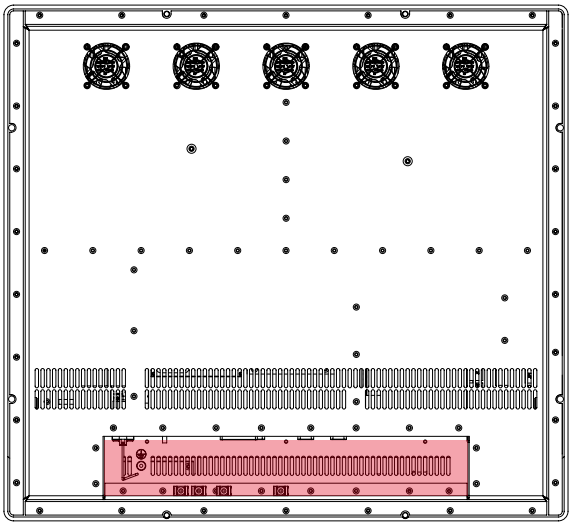

General Installation Recommendations

Maximum Cable Length

The RGB/DVI cable should generally be kept as short as possible to provide a high quality output on the display. The maximum cable length will depend on the signal resolution and frequency, but also on the quality of the signal output from the computer. Recommended is 60Hz vertical frequency.

Cables up to 10 meters generally provides good picture quality even with a 1600x1200 (UXGA) 60Hz signal. In most cases (especially with lower resolutions) even longer cables will provide a satisfactory result. This should however be tested in advance before making the decision on how far the unit can be placed from the signal source.

Standard Bracket

When mounting the bracket on the MMC products, USE only the provided bracket kit. Using any other or longer bolts may/or will do serious damage to components inside the product, and will void warranty! Use a Allen Wrench tool to fasten the middle bolts.

Please see the Technical Drawings section in this manual for additional information.

<u>Provided kit consists of:</u>
4 pcs of RenCol Tristar Knob Male - M6x10 mm
4 pcs of MicroPlastic - 6mm Nylon washer.
4 pcs of Bolt with shoulder washer - M6x1x20mm
4 pcs of Flat washer



Mount the bracket with the center bolt and washers on each side.

Mount the Tristar bolts on each side.
Adjust the tilting angle and secure all bolts.

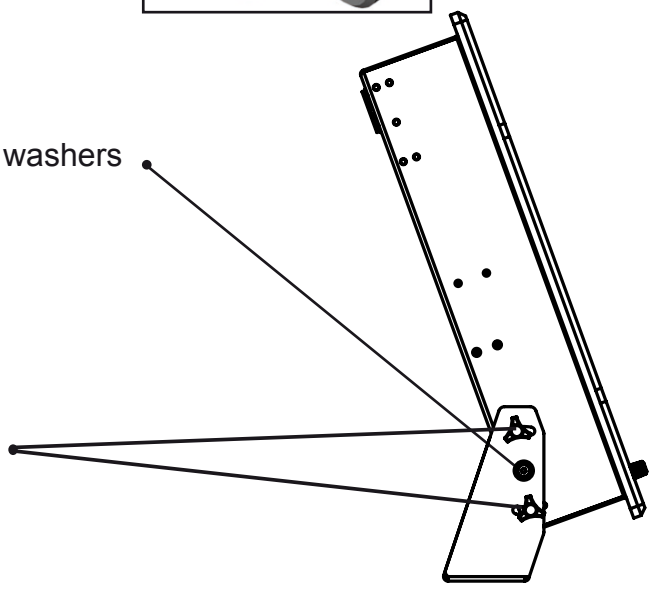

Physical Connections - MMC based models

Connector area of panel computer

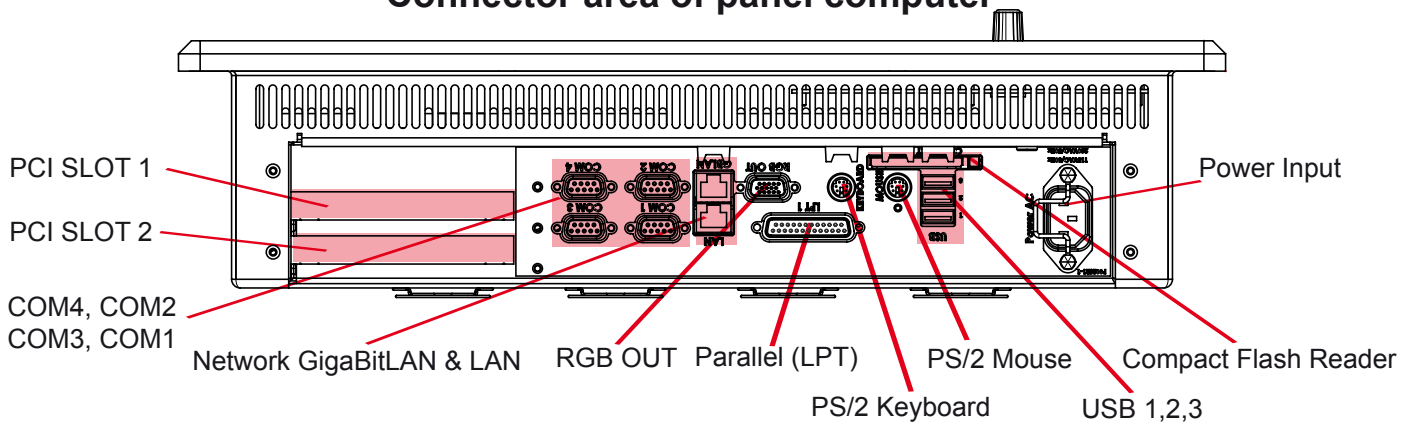

NOTE: Available connectors / locations may vary depending on model !

PCI Slots 1&2: (Not available on all models!)

Supports PCI (Short Length / Standard Profile) card in two available slots. These PCI cards are normally installed from factory or returned to factory for upgrading if needed. Note that warranty will be void if you install PCI cards yourselves. In order to mount PCI cards, the chassis of the unit must be removed, thus making warranty void as the warranty sticker would have to be broken. The PCI slots are not available on all MMC ETX models, due to space restrictions.

COM1,2,3,4 Serial Ports INPUT/OUTPUT:

Supports RS232 / RS422 / RS485 using D-SUB 9P Male connectors. Fasten the cable to the connector using the provided screws on the cable housing itself. (Factory default is RS232 only)

Internal Serial Remote Control (SCOM):

This is only an internal serial port and are available in the operating system as “COM2:”. It features a RS232 interface for controlling internal parameters like brightness and with special commands control the unit externally. Please consult the separate documentation located at the link: www.hatteland-display.com (support/accessories) for the SCOM interface.

Network INPUT/OUTPUT:

Supports 10/100Mbps Ethernet (LAN) and 10/100/1000Mbps Ethernet (GBLAN). Suitable for twisted pair cables CAT.5E. Make sure the network cable connector ”clicks” into the RJ-45 connector.

RGB OUTPUT:

Will output a clone signal from the computer for use with external display or monitor. Connects via a High Density D-SUB 15P Female connector. Fasten the cable to the connector using the provided screws on the cable housing itself.

Physical Connections - MMC based models



LPT1 Parallel Port INPUT/OUTPUT:

Standard LPT1 Printer/Parallel (SPP/EPP/ECP) port using a D-SUB 25P Female connector. Fasten the cable to the connector using the provided screws on the cable housing itself.

PS/2 Keyboard and PS/2 Mouse INPUTS:

Connect the PS/2 keyboard cable to the PS/2 5P Connector (female) marked with KEYBOARD. Connect the PS/2 mouse cable to the PS/2 5P Connector (female) marked with MOUSE.



CompactFlash Reader:

CompactFlash Reader supports Type I & II cards. Insert the card gently into the slot with the logo facing towards the TFT display (only when the unit is off). The card is removed by pressing the EJECT button next to the card slot. A wide range of card sizes are supported.

NOTE: DO NOT ATTEMPT TO REMOVE THE FLASH CARD WHILE THE UNIT IS OPERATING!
This is based on that the CF Slot has been configured to operate as a IDE device. If the Flash Card is removed from the slot while the unit is on, data may be lost or partly corrupted.



USB1,2,3 INPUT/OUTPUT:

Supports any USB1.1 (12Mbps) or USB2.0* (480Mbps) compliant peripherals. Drivers for most USB devices are useally included in operating system or on separate installation CD's delivered with product. USB 1.1 devices will operate in USB 1.1 mode (12 Mbps)
*Note: USB2.0 may not be supported on all MMC ETX models. Please review the specifications.

Power INPUT: (AC or DC Model)



AC MODEL ONLY:
The internal AC power module supports both 115VAC/60Hz and 230/50Hz power input using a standard IEC European power plug.



DC MODEL ONLY:
Secure the cables (check polarity!) to the screw terminal. The internal DC power module supports 24 VDC.

This page left intentionally blank

Operation
MMC Products

Front area of panel computer

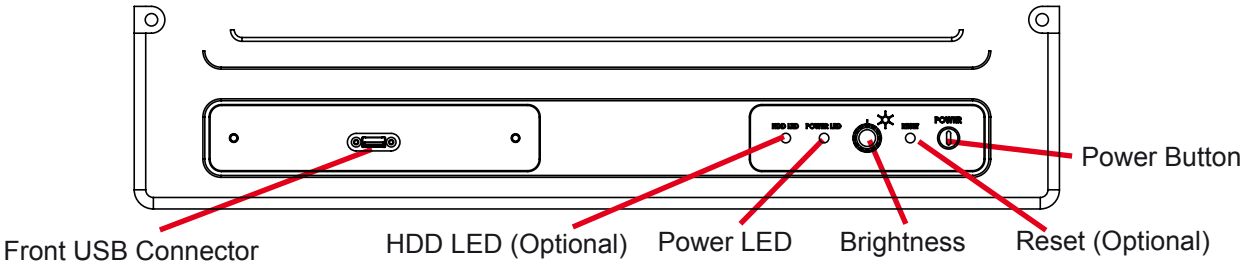

NOTE: Design & functionality may vary depending on model !



FRONT USB INPUT/OUTPUT:

Supports any USB 2.0 (480Mbps) compliant peripherals. Drivers for most USB devices are useally included in operating system or on separate installation CD's delivered with product. USB 1.1 devices will operate in USB 1.1 mode (12 Mbps).

NOTE: The hatch is IP66 rated if it has a mounted gasket on the back side (introduced Q4 2008).
Reference: http://www.hatteland-display.com/mails/30_2008_pcn.html



Power LED & Power Button:

To turn ON the computer, press down button and release it immediately. The power indication (LED) will turn green and any operating system will automatically boot. If the computer is in standby this LED will be red. To turn OFF the computer, press down this button and hold it for 3 seconds. The operating system may require additionally tasks to be performed before computer shuts down and turns off the unit.

Brightness:

The product features a 100% dimmable image, which means it is capable of displaying a completely black image when the brightness knob is turned fully to the left.

Note: If the display is delivered with Transflective Technology, the dimming may vary depending on environment. Transflective Technology uses environment / ambient lighting to preserve / enhance the brightness, meaning such products are very suitable for viewing in direct sunlight.

HDD LED & Reset Button - Alternative front user controls:

Due to product enhancement in Q4 2008, the MMC series went through a Product Change Notification where the HDD LED and Reset Button Aperture was removed from standard factory models. Instead, these features was provided as an option.
Reference: http://www.hatteland-display.com/mails/30_2008_pcn.html or review the appropriate user manual:
http://www.hatteland-display.com/pdf/manual/ inb100014-1_usermanual_mmc_etx_slim_rev23.pdf

Specifications

Specifications - JH 10T08 MMC

Note: All specifications are subject to change without prior notice!

TECHNICAL DESCRIPTION

TFT Technology:

- 10.4 inch viewable image size
- Active Matrix, Thin Film Transistor (TFT)
- RGB vertical stripe

TFT Characteristics:

• Pixel number	: 800 x 600
• Pixel pitch (RGB)	: 0.264 (H) x 0.264 (V) mm
• Response Time	: 10 ms (typical), "black" to "white"
• Contrast Ratio	: 500:1 (typical)
• Light Intensity	: 400 cd/m2 (typical)
• Viewable Angle	: 40 deg. (Up), 60 deg. (Down/Left/Right)
	: (@ CR > 10)
• Active Display Area	: 211.2 (H) x 158.4 (V) mm
• Max Colors	: 262,144 (6-bit max)

Computer Specifications:

• Installed OS	: None, please specify when ordering
• Processor	: Intel® Pentium®M 1.1GHz, Low Voltage
• Cache / PCI Clock	: 1MB Level 2 Cache / 400 MHz BUS
• System Chipset	: Intel® 82855GME
• BIOS	: Phoenix 2Mbit Flash, Supports ACPI
• PC/104 Slot	: 1 x PC/104 with ISA Support
• Memory Slot	: 1 x SODIMM with ECC, from 256MB->1GB
• Graphics Chip	: Intel® 82855GME (Integrated/250MHz)
• IDE Controller	: 1 x IDE Ports, Ultra DMA33/66/100
• Storage	: 1 x Automotive 40GB, 2.5" IDE, 4200 RPM
• Compact Flash	: 1 x CF Socket with Eject (Type I & II)
• Parallel Port (LPT)	: 1 x EPP/ECP Port
• Primary Ethernet	: 1 x 10/100 Mbps
• Secondary Ethernet	: 1 x 10/100/1000 Mbps
• Serial Ports	: 4 x RS232/RS422/RS485 (fully isolated)*
• USB Ports	: 4 x USB (2.0 compliant, 480Mbps)
• Keyboard/Mouse	: 2 x PS/2
• Supported TFT Res.	: From 640 x 480 up to 2048 x 1536**
• RGB OUT Res	: From 640 x 480 up to 1600 x 1200

** only in RS422/485 mode*
*** Optimal 1:1 resolution and recommended is 800 x 600 @ 60 Hz.*
*** If resolutions is set above 1:1, desktop scrolling mode will be used.*

Power Specifications:

Power Supply Options:

• 115 & 230VAC - 50/60Hz	: Model JH 10T08 MMC A1
• 24 VDC	: Model JH 10T08 MMC A2

Power Consumption:

• Operating	: 100W (max) (Configuration depending)
	: 65W (typ) (Max backlight & high CPU load)

Available Technical Options:

Miscellaneous Options:

• Audio AC97 Compliant	: Line In/Out, Mic In, Speaker Out
• Processor	: Up to 1.8 GHz
• Memory	: Up to 1GB

MECHANICAL DESCRIPTION

Physical Dimensions:

- 339 (W) x 256 (H) x 105 (D) mm
- 13.35" (W) x 10.08" (H) x 4.13" (D)
- Weight: 7 kg (approx)

User Controls:

On front bezel:
- Power On/Off (push button)
- Brightness Control
- Power LED

Behind IP66 rated hatch:
- USB 2.0 connector

Environmental Considerations:

• Operating	: Temperature -15 deg. C to +55 deg. C Humidity up to 95%
• Storage	: Temperature -20 deg. C to +70 deg. C Humidity up to 95%
• IP-rating	: IP66

Safety Considerations:

Even although the test conditions for bridge units provide for a maximum operating temperature of 55°C, continuous operation of all electronic components should, if possible, take place at ambient temperatures of only 25°C. This is a necessary prerequisite for long life and low service costs.

Input/Output Connectors:

Function	Back side	Inside	Front
Ethernet Lan/GBLan	2 x RJ-45		
PC/104 Slot		1 x PC/104 Slot	
Keyboard	1 x PS/2		
Mouse	1 x PS/2		
Compact Flash	1 x CF Socket		
COM 1	1 x DB9M		
COM 2	1 x DB9M		
COM 3	1 x DB9M		
COM 4	1 x DB9M		
LPT1	1 x DB25F		
USB2.0	3 x USB		1 x USB
AC Power	Std IEC inlet (Odd version models)		
DC Power	DC Screw terminal (Even version models)		
RGB Out	1 x HD-15F		
Line In/Out	3.5mm mini jack (depends on model)		
Mic In	3.5mm mini jack (depends on model)		

Available Mechanical Options:

- JH 10TSV : Sun visor *
- P005335-1 : Front Label with HDD LED and Reset Button Aperture
- Touch Screen **

** Option: Standard or custom logo and color*
*** Option: Factory mounted*



Standard/Retrofit



P005335-1

Compass Safe Distance: JH 10T08 MMC Standard: 55cm Steering: 40cm

APPROVALS & CERTIFICATES

This product have been tested / type approved by the following classification societies:

EN60945 4th (IEC945 4th)
IACS E10
GL - Germanischer Lloyd
DNV - Det Norske Veritas
ABS - American Bureau of Shipping
LRS - Lloyd's Register of Shipping
BV - Bureau Veritas
ClassNK - Nippon Kaiji Kyokai

Specifications - JH 15T05 MMC

Note: All specifications are subject to change without prior notice!

TECHNICAL DESCRIPTION

TFT Technology:

- 15.0 inch viewable image size
- Color Active Matrix LCD Module
- a-Si Thin Film Transistor (TFT)

TFT Characteristics:

• Pixel number	: 1024 x 768
• Pixel pitch (RGB)	: 0.297 (H) x 0.297 (V) mm
• Response Time	: 25 ms (typical), black to white to black
• Contrast Ratio	: 400:1 (typ)
• Light Intensity	: 250 cd/m2 (typical)
• Viewable Angle	: +/- 85 deg. (min) (Up/Down/Left/Right)
	: (@ CR > 10)
• Active Display Area	: 304.1 (H) x 228.1 (V) mm
• Max Colors	: 16.7 millions

Computer Specifications:

• Installed OS	: None, please specify when ordering
• Processor	: Intel® Pentium®M 1.1GHz, Low Voltage
• Cache / PCI Clock	: 1MB Level 2 Cache / 400 MHz BUS
• System Chipset	: Intel® 82855GME
• BIOS	: Phoenix 2Mbit Flash, Supports ACPI
• PC/104 Slot	: 1 x PC/104 with ISA Support
• Memory Slot	: 1 x SODIMM with ECC, from 256MB->1GB
• Graphics Chip	: Intel® 82855GME (Integrated/250MHz)
• IDE Controller	: 1 x IDE Ports, Ultra DMA33/66/100
• Storage	: 1 x Automotive 40GB, 2.5" IDE, 4200 RPM
• Compact Flash	: 1 x CF Socket with Eject (Type I & II)
• Parallel Port (LPT)	: 1 x EPP/ECP Port
• Primary Ethernet	: 1 x 10/100 Mbps
• Secondary Ethernet	: 1 x 10/100/1000 Mbps
• Serial Ports	: 4 x RS232/RS422/RS485 (fully isolated)*
• USB Ports	: 4 x USB (2.0 compliant, 480Mbps)
• Keyboard/Mouse	: 2 x PS/2
• Supported TFT Res.	: From 640 x 480 up to 2048 x 1536**
• RGB OUT Res	: From 640 x 480 up to 1600 x 1200

** only in RS422/485 mode*
*** Optimal 1:1 resolution and recommended is 1024 x 768 @ 60 Hz.*
*** If resolutions is set above 1:1, desktop scrolling mode will be used.*

Power Specifications:

Power Supply Options:

• 115 & 230VAC - 50 / 60Hz	: Model JH 15T05 MMC-A1
• 24 VDC	: Model JH 15T05 MMC-A2

Power Consumption:

• Operating	: 100W (max) (Configuration depending)
	: 65W (typ AC) (Max backlight & high CPU load)
	: 44,2W (typ DC) (Max backlight & high CPU load)

Factory Options:

• Audio AC97 Compliant	: Line In/Out, Mic In, Speaker Out
• TV-Out	: 1 x Composite (Depends on model)
• Processor	: Up to 1.8 GHz
• Memory	: Up to 1GB
• Touch Screen	
• Internal Serial Remote Control (SCOM) - JH 15T05 MMC-Ex models	

MECHANICAL DESCRIPTION

Physical Dimensions:

- 412 (W) x 345 (H) x 97.5 (D) mm - 16.22" (W) x 13.58" (H) x 3.84" (D)
- Weight: 8 kg (approx)

User Controls:

On front bezel:
- Power On/Off (push button)
- Brightness Control
- Power LED

Behind IP66 rated hatch:
- USB 2.0 connector(s)

Environmental Considerations:

• Operating	: Temperature -15 deg. C to +55 deg. C Humidity up to 95%
• Storage	: Temperature -20 deg. C to +70 deg. C Humidity up to 95%
• IP-Rating	: IP66

Safety Considerations:
Even although the test conditions for bridge units provide for a maximum operating temperature of 55°C, continuous operation of all electronic components should, if possible, take place at ambient temperatures of only 25°C. This is a necessary prerequisite for long life and low service costs.

Input/Output Connectors:

Function	Back side	Inside	Front
Ethernet Lan/GBLan	2 x RJ-45		
PC/104 Slot		1 x PC/104 Slot	
Keyboard	1 x PS/2		
Mouse	1 x PS/2		
Compact Flash	1 x CF Socket		
COM 1	1 x DB9M		
COM 2	1 x DB9M		
COM 3	1 x DB9M		
COM 4	1 x DB9M		
LPT1	1 x DB25F		
USB2.0	3 x USB		1 x USB
AC Power	Std IEC inlet (Odd version models)		
DC Power	DC Screw terminal (Even version models)		
RGB Out	1 x HD-15F		
TV Out	Composite RCA (depends on model)		
Line In/Out	3.5mm mini jack (depends on model)		
Mic In	3.5mm mini jack (depends on model)		

Accessories:

• JH 15TSV	: Sun visor *
• JH 15TBRMMC	: Bracket *
• JH 15TAP STD	: 15" Adapter Plate/Frame to 19" Rack
• P005335-1	: Front Label with HDD LED and Reset Button Aperture

Standard/Retrofit



P005335-1

* *Option: Standard or custom logo and color*

Compass Safe Distance: JH 15T05 MMC Standard: 125cm Steering: 80cm

APPROVALS & CERTIFICATES

This product have been tested / type approved by the following classification societies:

EN60945 4th (IEC945 4th)
IACS E10
ABS - American Bureau of Shipping)
ClassNK - Nippon Kaiji Kyokai
GL - Germanischer Lloyd
LRS - Lloyd's Register of Shipping
DNV - Det Norske Veritas
BV - Bureau Veritas
RS - Russian Maritime Register of Shipping

Specifications - JH 19T02 MMC

Note: All specifications are subject to change without prior notice!

TECHNICAL DESCRIPTION

TFT Technology:

- 19.0 inch viewable image size
- Active Matrix, Thin Film Transistor (TFT)
- MVA Premium™ Technology

TFT Characteristics:

• Pixel number	: 1280 x 1024
• Pixel pitch (RGB)	: 0.294 (H) x 0.294 (V) mm
• Response Time	: 15 ms (typical), "black" to "white"
• Contrast Ratio	: 700:1 (typ)
• Light Intensity	: 300 cd/m2 (typical)
• Viewable Angle	: +/- 85 deg. (min) (Up/Down/Left/Right) (@ CR > 10)
• Active Display Area	: 376.32 (H) x 301.056 (V) mm
• Max Colors	: 16.7 millions

Std Computer Specifications:

• Installed OS	: None, please specify when ordering
• Processor	: Intel® Pentium®M 1.1GHz, Low Voltage
• Cache / PCI Clock	: 1MB Level 2 Cache / 400 MHz BUS
• System Chipset	: Intel® 82855GME
• BIOS	: Phoenix 2Mbit Flash, Supports ACPI
• PCI Slot (Limited height)	: 2 x Short Length, STD Profile, 32Bit PCI
• PC/104 Slot	: 1 x PC/104 with ISA Support
• Memory Slot	: 1 x SODIMM with ECC, Max 1GB
• Graphics Chip	: Intel® 82855GME (Integrated/250MHz)
• IDE Controller	: 1 x IDE Ports, Ultra DMA33/66/100
• Storage	: 1 x Automotive, see "Common Type Numbers"
• Compact Flash	: 1 x CF Socket with Eject (Type I & II)
• Parallel Port (LPT)	: 1 x EPP/ECP Port
• Primary Ethernet	: 1 x 10/100 Mbps
• Secondary Ethernet	: 1 x 10/100/1000 Mbps
• Serial Ports	: 4 x RS232/RS422/RS485 (fully isolated)*
• USB Ports	: 4 x USB (2.0 compliant, 480Mbps)
• Keyboard/Mouse	: 2 x PS/2
• Supported TFT Res.	: From 640 x 480 up to 2048 x 1536**
• RGB OUT Res	: From 640 x 480 up to 1600 x 1200

** only in RS422/485 mode*
*** Optimal 1:1 resolution and recommended is 1280 x 1024 @ 60 Hz.*
*** If resolutions is set above 1:1, desktop scrolling mode will be used.*

Power Specifications:

Power Supply Options:

• 115 & 230VAC - 50 / 60Hz	: Model JH 19T02 MMC A1/A3/A6/C1
• 24 VDC	: Model JH 19T02 MMC A2/C2

Power Consumption:

• Operating	: 100W (max) (Configuration depending)
	: 75W (typ) (Max backlight & high CPU load)

Available Technical Options:

Miscellaneous Options:

• Audio AC97 Compliant	: Line In/Out, Mic In, Speaker Out
• TV-Out	: 1 x Composite (Depends on model)
• Processor	: Up to 1.8 GHz
• Memory	: Up to 1GB

MECHANICAL DESCRIPTION

Physical Considerations:

- 483 (W) x 444 (H) x 114 (D) mm - 19.02" (W) x 17.48" (H) x 4.39" (D)
- Weight: 11 kg (approx)

User Controls:

On front bezel:
- Power On/Off (push button), Brightness Control & Power LED

Behind IP66 rated hatch:
- USB 2.0 connector

Environmental Considerations:

• Operating	: Temperature -15 deg. C to +55 deg. C - Humidity up to 95%
• Storage	: Temperature -20 deg. C to +70 deg. C - Humidity up to 95%
• Compass Safe Dist.	: JH 19T02 MMC-xy - Std: 75cm Steering: 55cm
• IP-Rating	: IP66

Safety Considerations:
Even although the test conditions for bridge units provide for a maximum operating temperature of 55°C, continuous operation of all electronic components should, if possible, take place at ambient temperatures of only 25°C. This is a necessary prerequisite for long life and low service costs.

Input/Output Connectors:

Function	Back side	Inside	Front
Ethernet Lan/GBLan	2 x RJ-45		
PCI Slot (Limited height)		2 x Short/STD	
PC/104 Slot		1 x PC/104 Slot	
Keyboard	1 x PS/2		
Mouse	1 x PS/2		
Compact Flash	1 x CF Socket		
COM 1	1 x DB9M		
COM 2	1 x DB9M		
COM 3	1 x DB9M		
COM 4	1 x DB9M		
LPT1	1 x DB25F		
USB2.0	3 x USB		1 x USB
AC Power	Std IEC inlet (Odd version models)		
DC Power	DC Screw terminal (Even version models)		
RGB Out	1 x HD-15F		
TV Out	Composite RCA (depends on model)		
Line In/Out	3.5mm mini jack (depends on model)		
Mic In	3.5mm mini jack (depends on model)		
Speaker Out	3.5mm mini jack (depends on model)		

Available Mechanical Options:

• JH 19TSV	: Sun visor*
• JH 19TBRMMC-B1	: Bracket*
• JH 19TAP STD	: 19" adapter frame/plate to 21" CRT
• P005335-1	: Front Label with HDD LED and Reset Button Aperture
• Factory Mounted Touch Screen	

** Option: Standard or custom logo and color*
** Option: See separate datasheet for bracket drawings.*



Standard/Retrofit



P005335-1

APPROVALS & CERTIFICATES

This product have been tested / type approved by the following classification societies:

EN60945 4th (IEC945 4th)
IACS E10
ABS - American Bureau of Shipping
DNV - Det Norske Veritas
EN61174 (IEC1174) - Bundesamt für Seeschiffahrt und Hydrographie (BSH) (Only AC models)
GL - Germanischer Lloyd
LRS - Lloyd's Register of Shipping
RS - Russian Maritime Register of Shipping
BV - Bureau Veritas
ClassNK - Nippon Kaiji Kyokai

Specifications - JH 23T02 MMC

Note: All specifications are subject to change without prior notice!

TECHNICAL DESCRIPTION

TFT Technology:

- 23.1 inch viewable image size, High Quality SHARP TFT
- TFT active-matrix liquid crystal panel
- MVA (Multi-domain Vertical Alignment) LCD Technology

TFT Characteristics:

• Pixel number	: 1600 x 1200
• Pixel pitch (RGB)	: 0.294 (H) x 0.294 (V) mm
• Response Time	: 20 ms (typical), "black" to "white"
• Contrast Ratio	: 500:1 (typ)
• Light Intensity	: 250 cd/m2 (typical)
• Viewable Angle	: +/- 85 deg. (min) (Up/Down/Left/Right)
	: (@ CR > 10)
• Active Display Area	: 470.4 (H) x 352.8 (V) mm
• Max Colors	: 16.7 millions

Computer Specifications:

• Installed OS	: None, please specify when ordering
• Processor	: Intel® Pentium®M 1.1GHz, Low Voltage
• Cache / PCI Clock	: 1MB Level 2 Cache / 400 MHz BUS
• System Chipset	: Intel® 82855GME
• BIOS	: Phoenix 2Mbit Flash, Supports ACPI
• PCI Slot (Limited height)	: 2 x Short Length, STD Profile, 32Bit PCI
• PC/104 Slot	: 1 x PC/104 with ISA Support
• Memory Slot	: 1 x SODIMM with ECC, from 256MB->1GB
• Graphics Chip	: Intel® 82855GME (Integrated/250MHz)
• IDE Controller	: 1 x IDE Ports, Ultra DMA33/66/100
• Storage	: 1 x Automotive 40GB, 2.5" IDE, 4200 RPM
• Compact Flash	: 1 x CF Socket with Eject (Type I & II)
• Parallel Port (LPT)	: 1 x EPP/ECP Port
• Primary Ethernet	: 1 x 10/100 Mbps
• Secondary Ethernet	: 1 x 10/100/1000 Mbps
• Serial Ports	: 4 x RS232/RS422/RS485 (fully isolated)*
• USB Ports	: 4 x USB (2.0 compliant, 480Mbps)
• Keyboard/Mouse	: 2 x PS/2
• Supported TFT Res.	: From 640 x 480 up to 2048 x 1536**
• RGB OUT Res	: From 640 x 480 up to 1600 x 1200

** only in RS422/485 mode*
*** Optimal 1:1 resolution and recommended is 1600 x 1200 @ 60 Hz.*
*** If resolutions is set above 1:1, desktop scrolling mode will be used.*

Power Specifications:

Power Supply Options:

• 115 & 230VAC - 50 / 60Hz	: Model JH 23T02 MMC-A1
• 24 VDC	: Model JH 23T02 MMC-A2*

*(tests pending)

Power Consumption:

• Operating	: 100W (max) (Configuration depending)
	: 75W (typ) (Max backlight & high CPU load)

Available Technical Options:

Miscellaneous Options:

• Audio AC97 Compliant	: Line In/Out, Mic In, Speaker Out
• TV-Out	: 1 x Composite (Depends on model)
• Processor	: Up to 1.8 GHz
• Memory	: Up to 1GB

MECHANICAL DESCRIPTION

Physical Dimensions:

- 584 (W) x 534 (H) x 119 (D) mm - 22.99" (W) x 21.02" (H) x 4.69" (D)
- Weight: 18 kg (approx)

User Controls:

On front bezel:
- Power On/Off (push button)
- Brightness Control
- Power LED

Behind IP66 rated hatch:
- USB 2.0 connector

Environmental Considerations:

• Operating	: Temperature -15 deg. C to +55 deg. C
	Humidity up to 95%
• Storage	: Temperature -20 deg. C to +70 deg. C
	Humidity up to 95%
• IP-Rating	: IP66

Safety Considerations:

Even although the test conditions for bridge units provide for a maximum operating temperature of 55°C, continuous operation of all electronic components should, if possible, take place at ambient temperatures of only 25°C. This is a necessary prerequisite for long life and low service costs.

Input/Output Connectors:

Function	Back side	Inside	Front
Ethernet Lan/GBLan	2 x RJ-45		
PCI Slot		2 x Short/STD	
PC/104 Slot		1 x PC/104 Slot	
Keyboard	1 x PS/2		
Mouse	1 x PS/2		
Compact Flash	1 x CF Socket		
COM 1	1 x DB9M		
COM 2	1 x DB9M		
COM 3	1 x DB9M		
COM 4	1 x DB9M		
LPT1	1 x DB25F		
USB2.0	3 x USB		1 x USB
AC Power	Std IEC inlet (Odd version models)		
DC Power	DC Screw terminal (Even version models)		
RGB Out	1 x HD-15F		
TV Out	Composite RCA (depends on model)		
Line In/Out	3.5mm mini jack (depends on model)		
Mic In	3.5mm mini jack (depends on model)		

Available Mechanical Options:

- JH 23TSV : Sun visor *
- JH 23TBRMMC-B1 : Bracket*
- P005335-1 : Front Label with HDD LED and Reset Button Aperture
- Touch Screen **

** Option: Standard or custom logo and color*
** Option: See separate datasheet for bracket specifications.*
*** Option: Factory mounted*



Standard/Retrofit



P005335-1

Compass Safe Distance: JH 23T02 MMC Standard: 175cm Steering: 140cm

APPROVALS & CERTIFICATES

This product have been tested / type approved by the following classification societies: (1=AC Version, 2=DC Version)

EN60945 4th (IEC945 4th)
IACS E10
ClassNK - Nippon Kaiji Kyokai (1,2)
DNV - Det Norske Veritas (1)
RS - Russian Maritime Register of Shipping (1,2)
GL - Germanischer Lloyd (1,2)
BV - Bureau Veritas (1,2)
ABS - American Bureau of Shipping (1,2)
LRS - Lloyd's Register of Shipping (1,2)

This page left intentionally blank

Technical Drawings

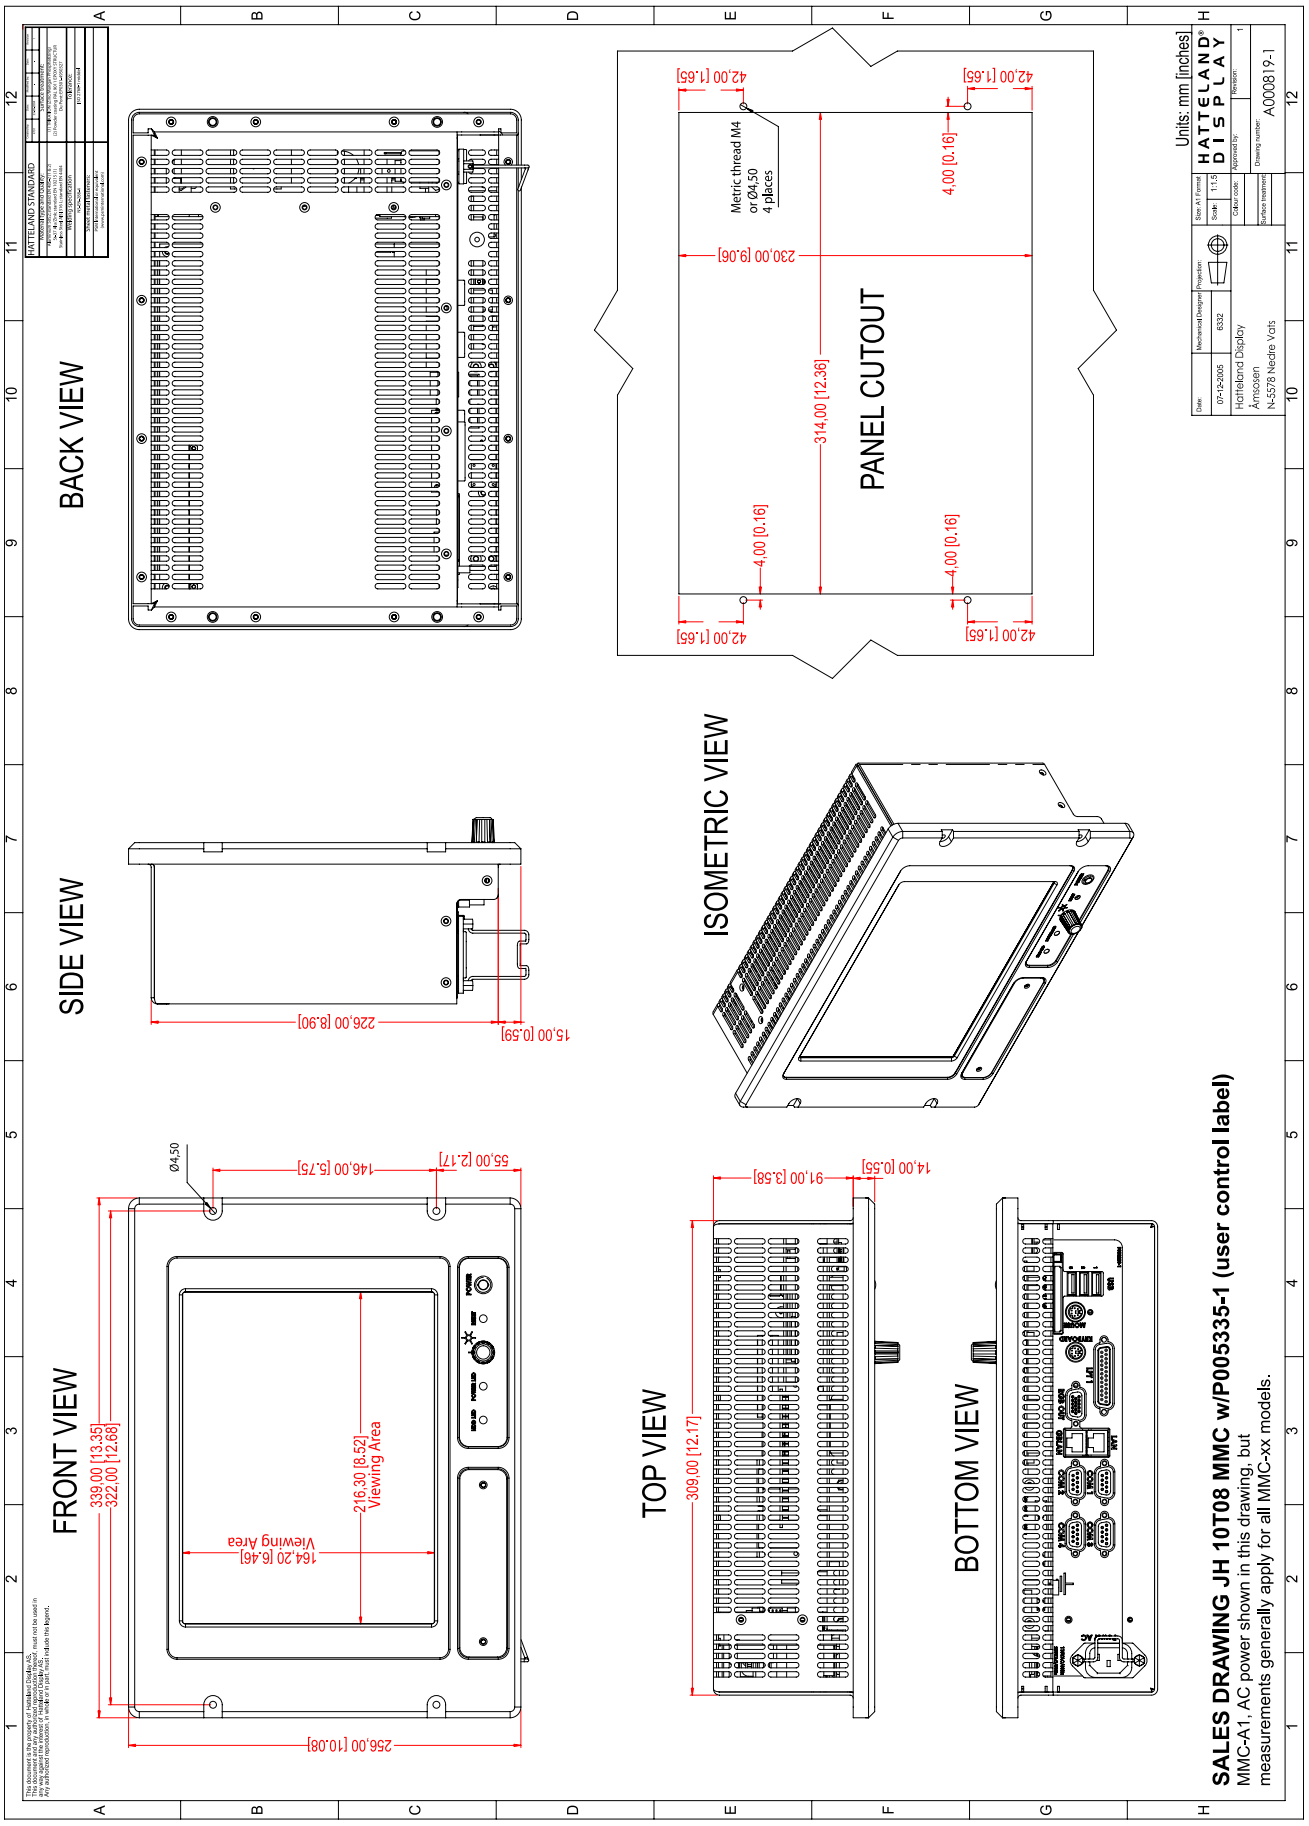

SALES DRAWING JH 10T08 MMC w/P005335-1 (user control label)

MMC-A1, AC power shown in this drawing, but measurements generally apply for all MMC-xx models.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

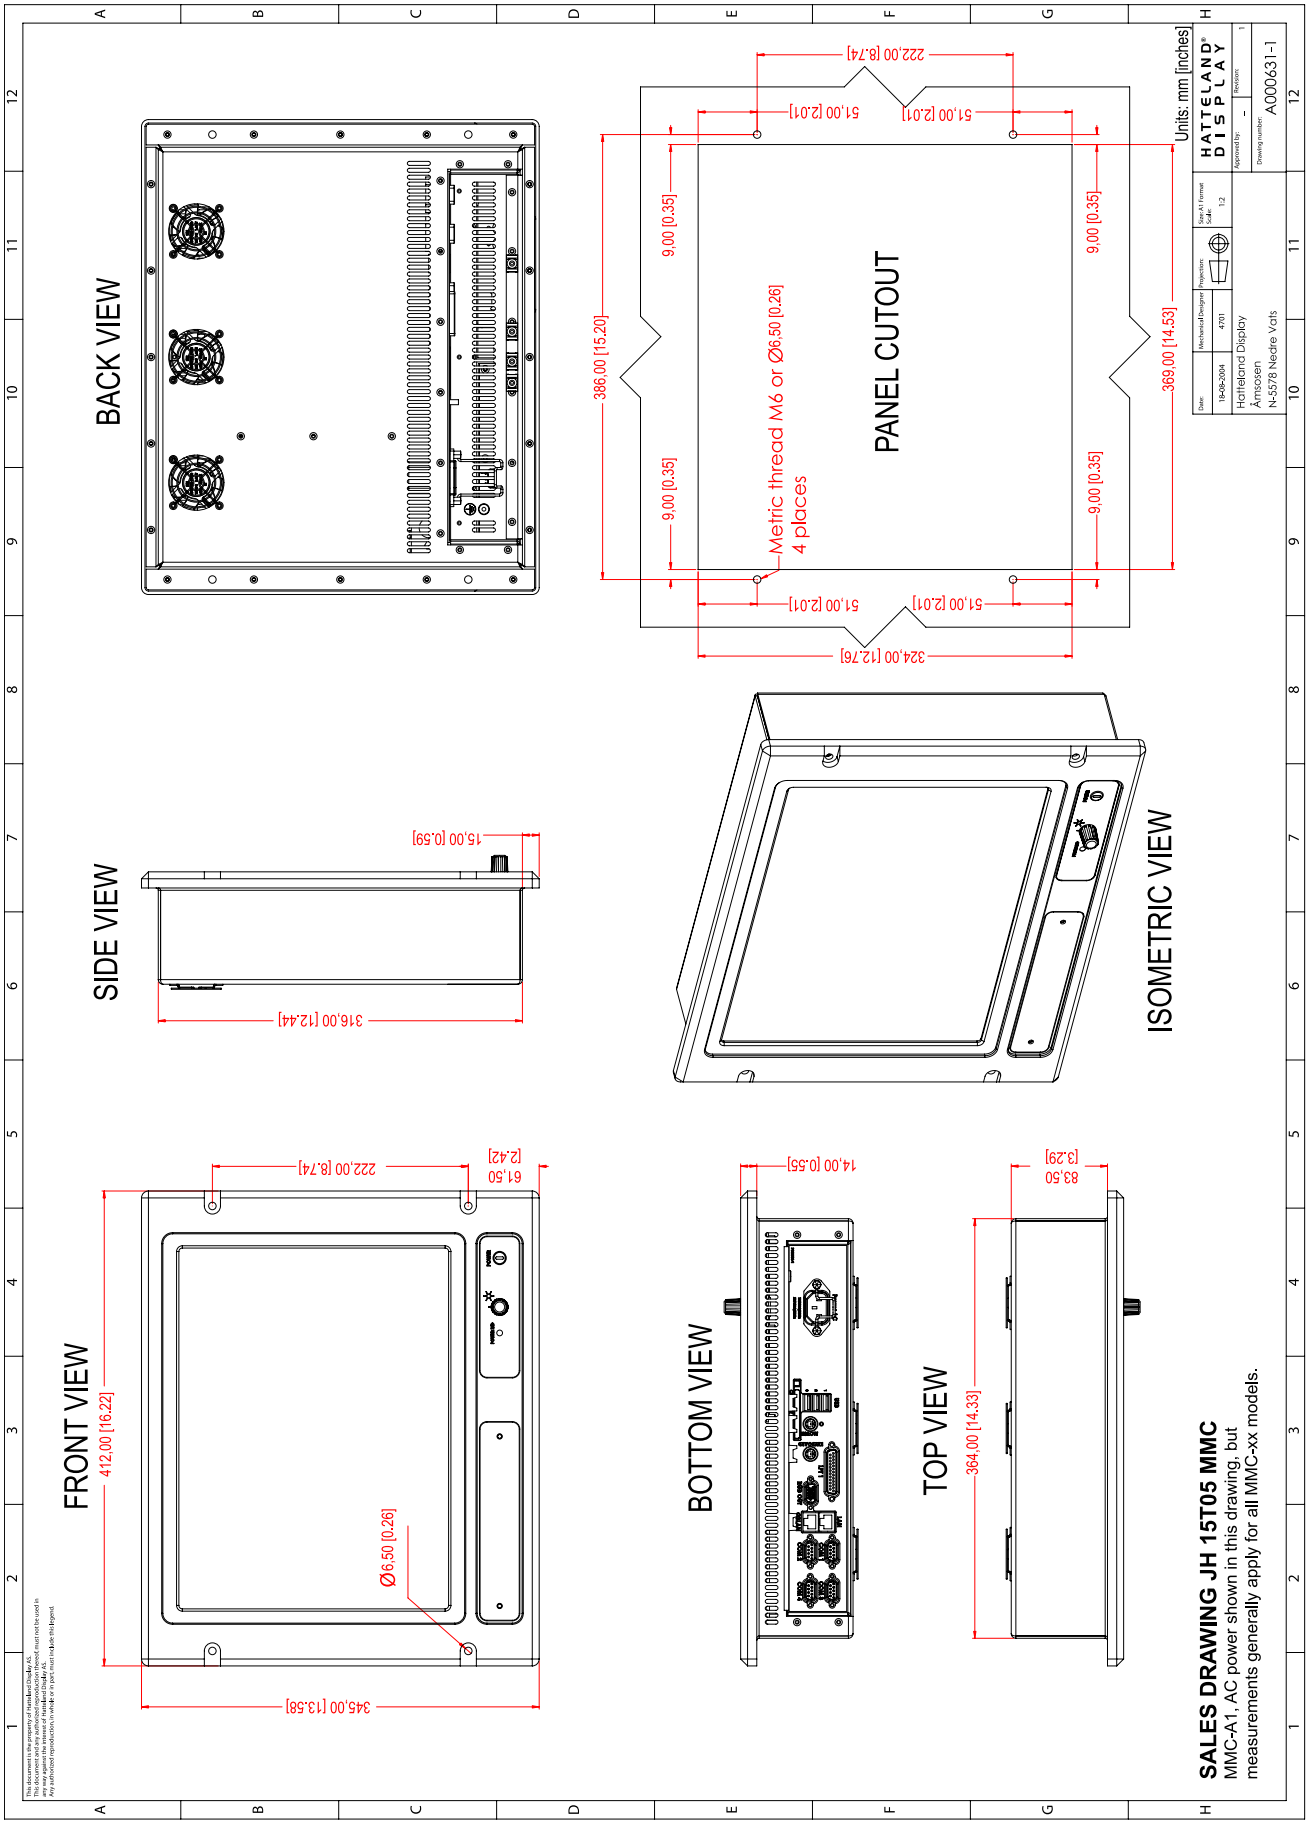

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

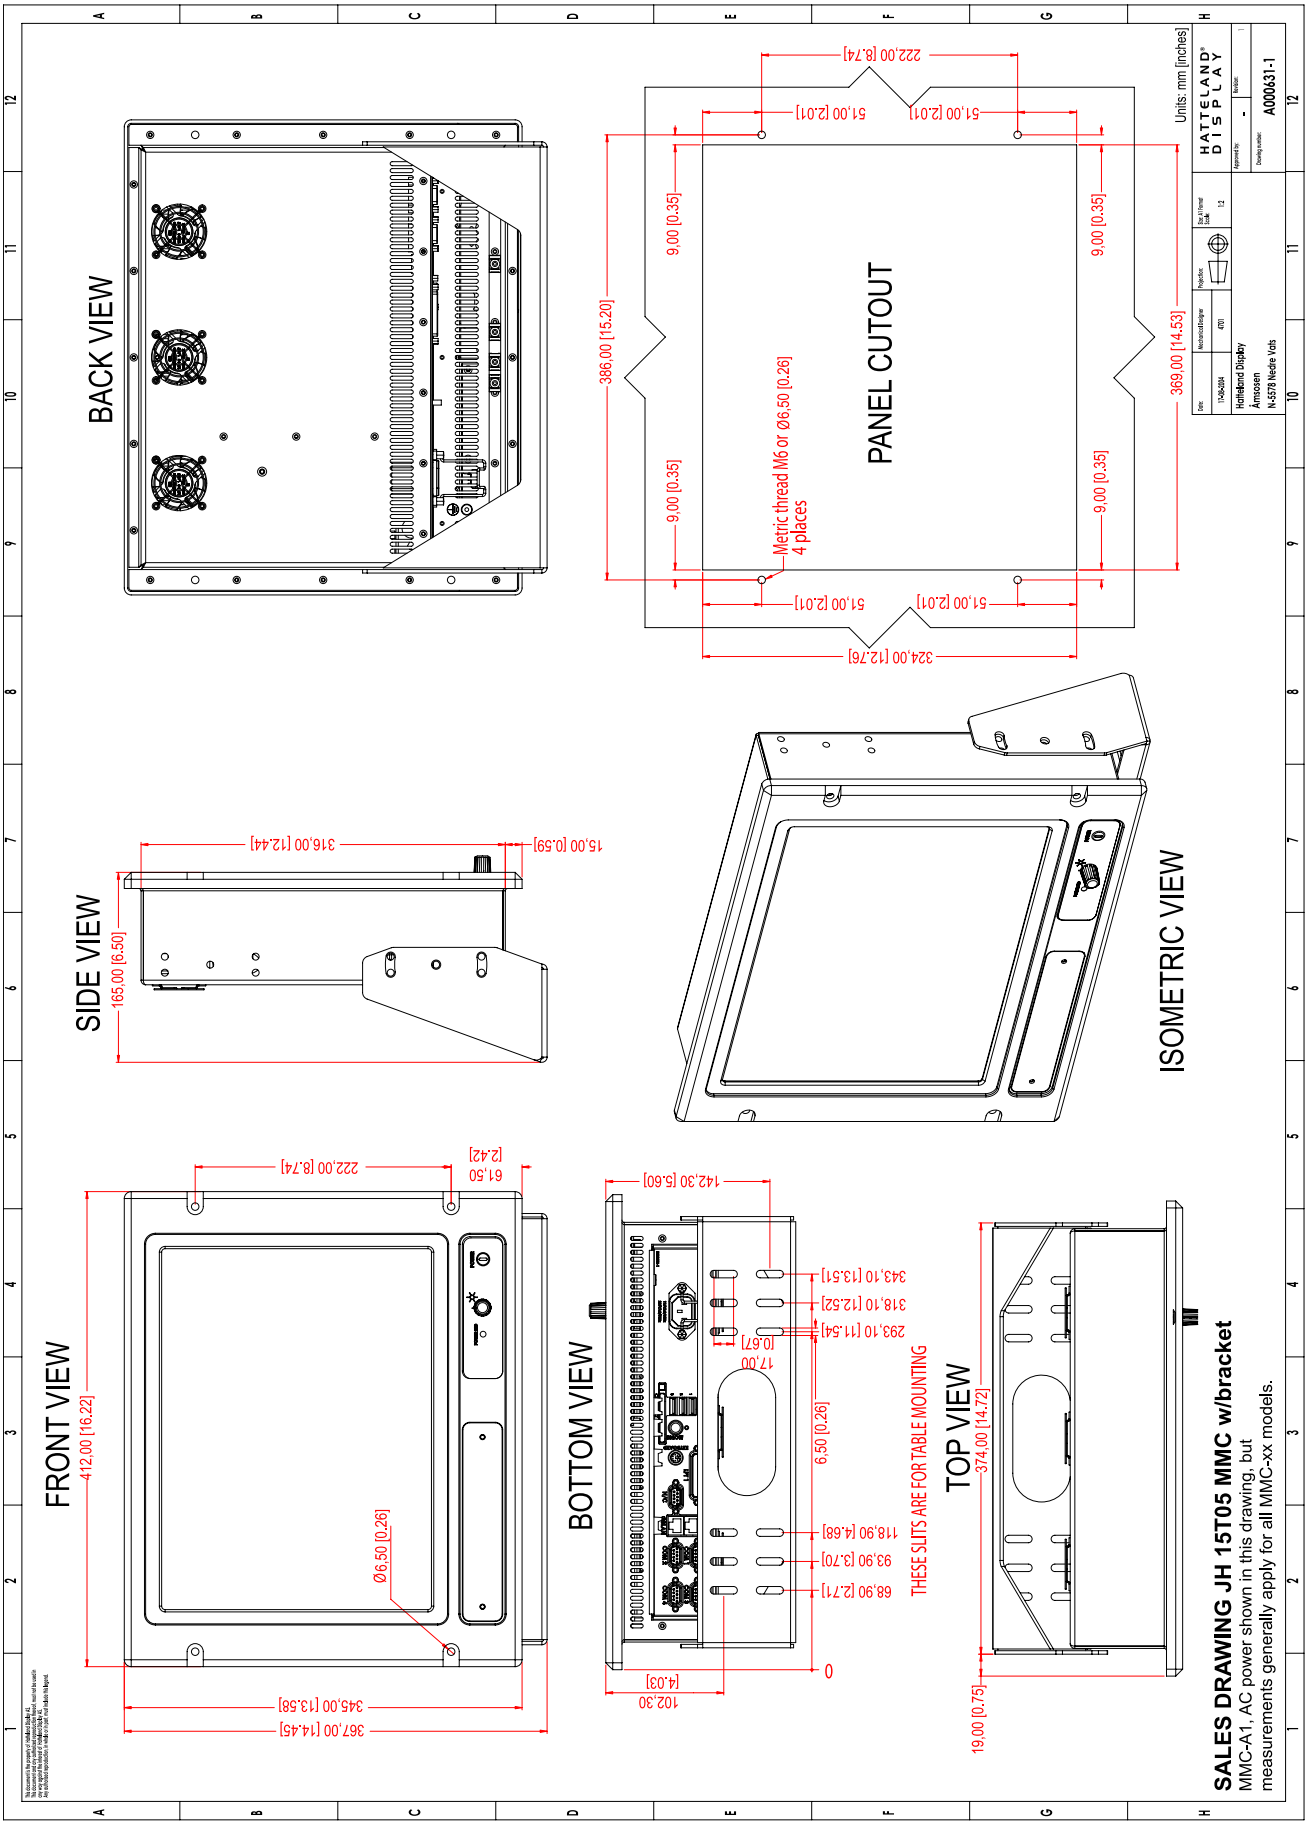

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

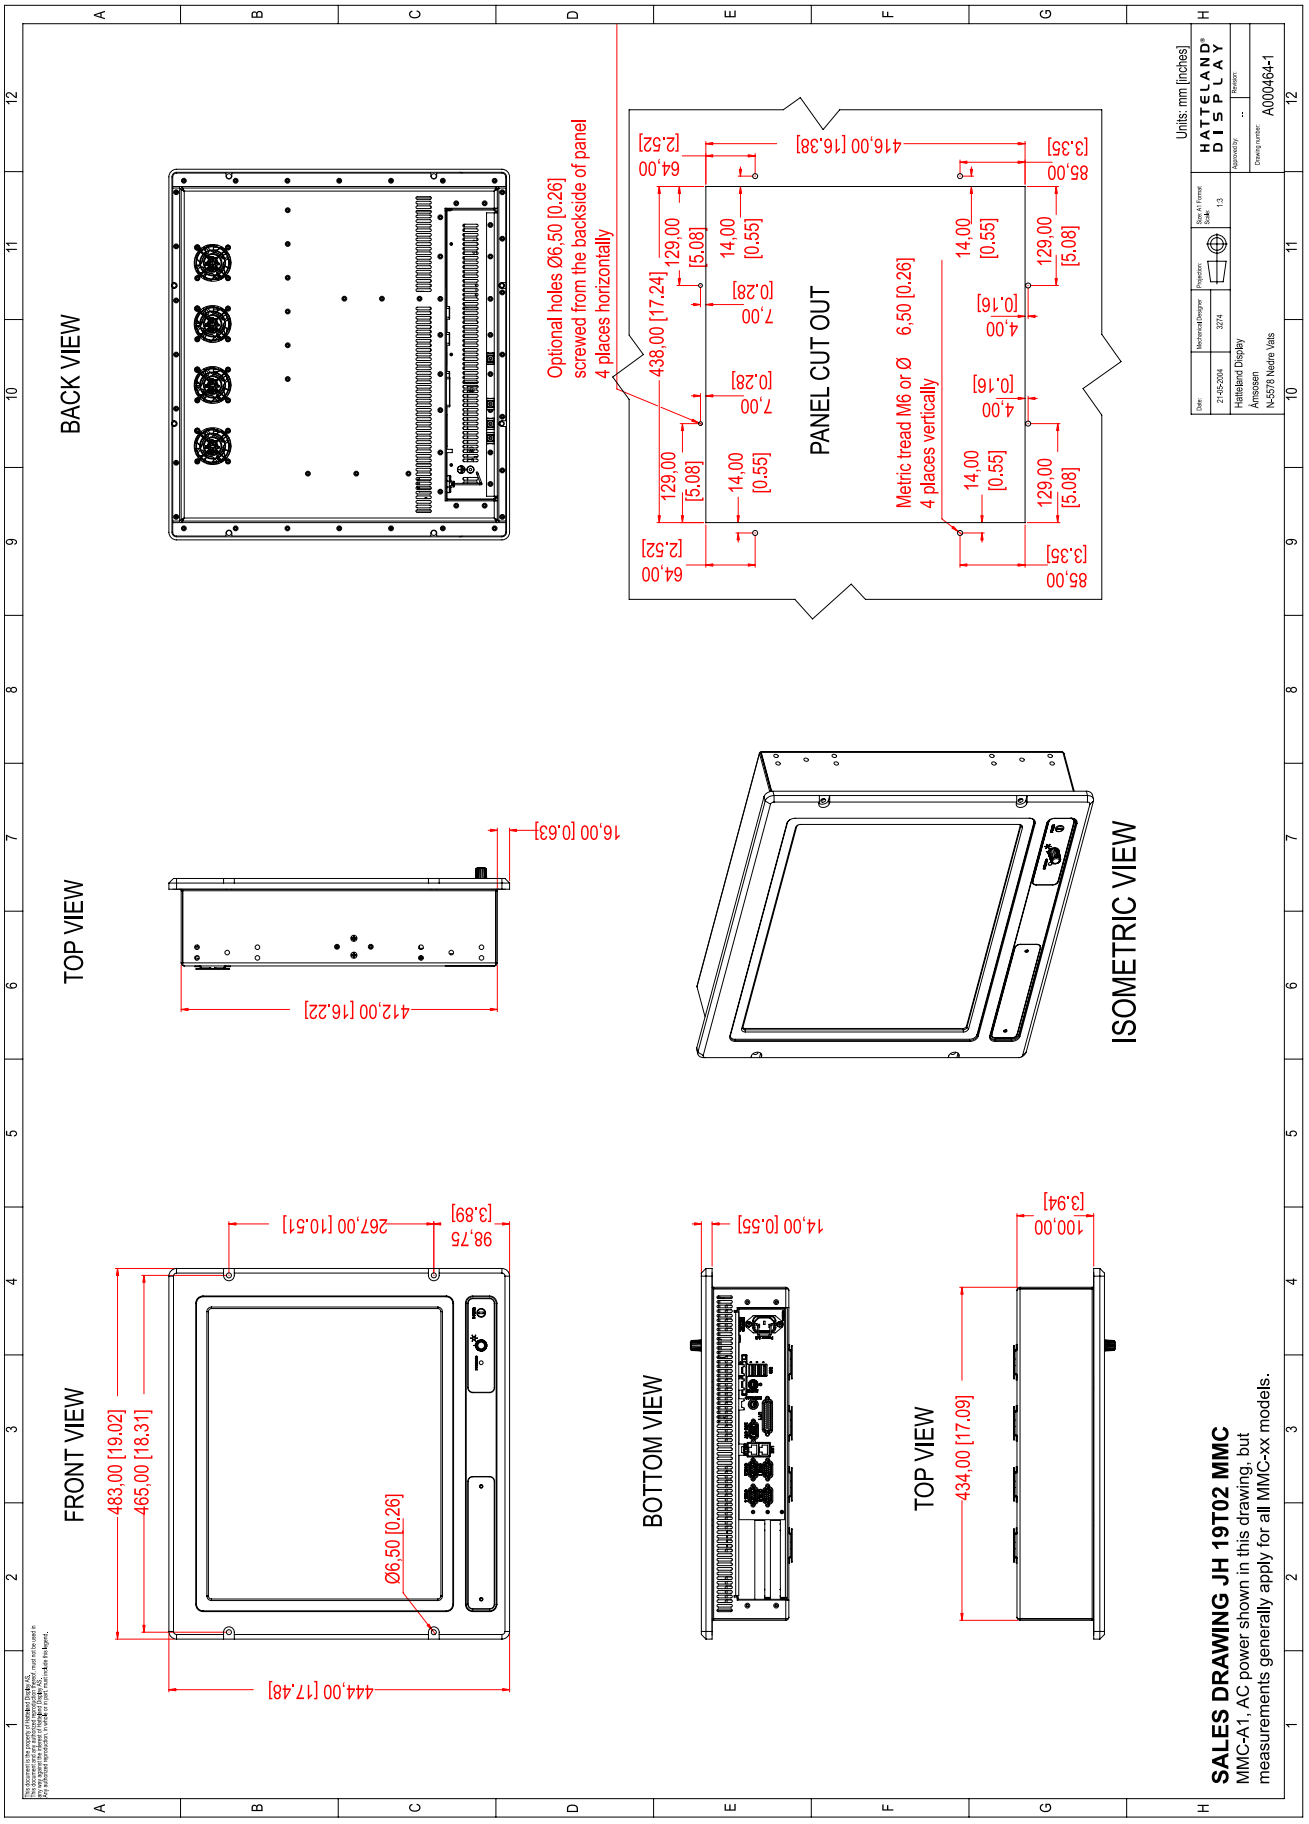

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

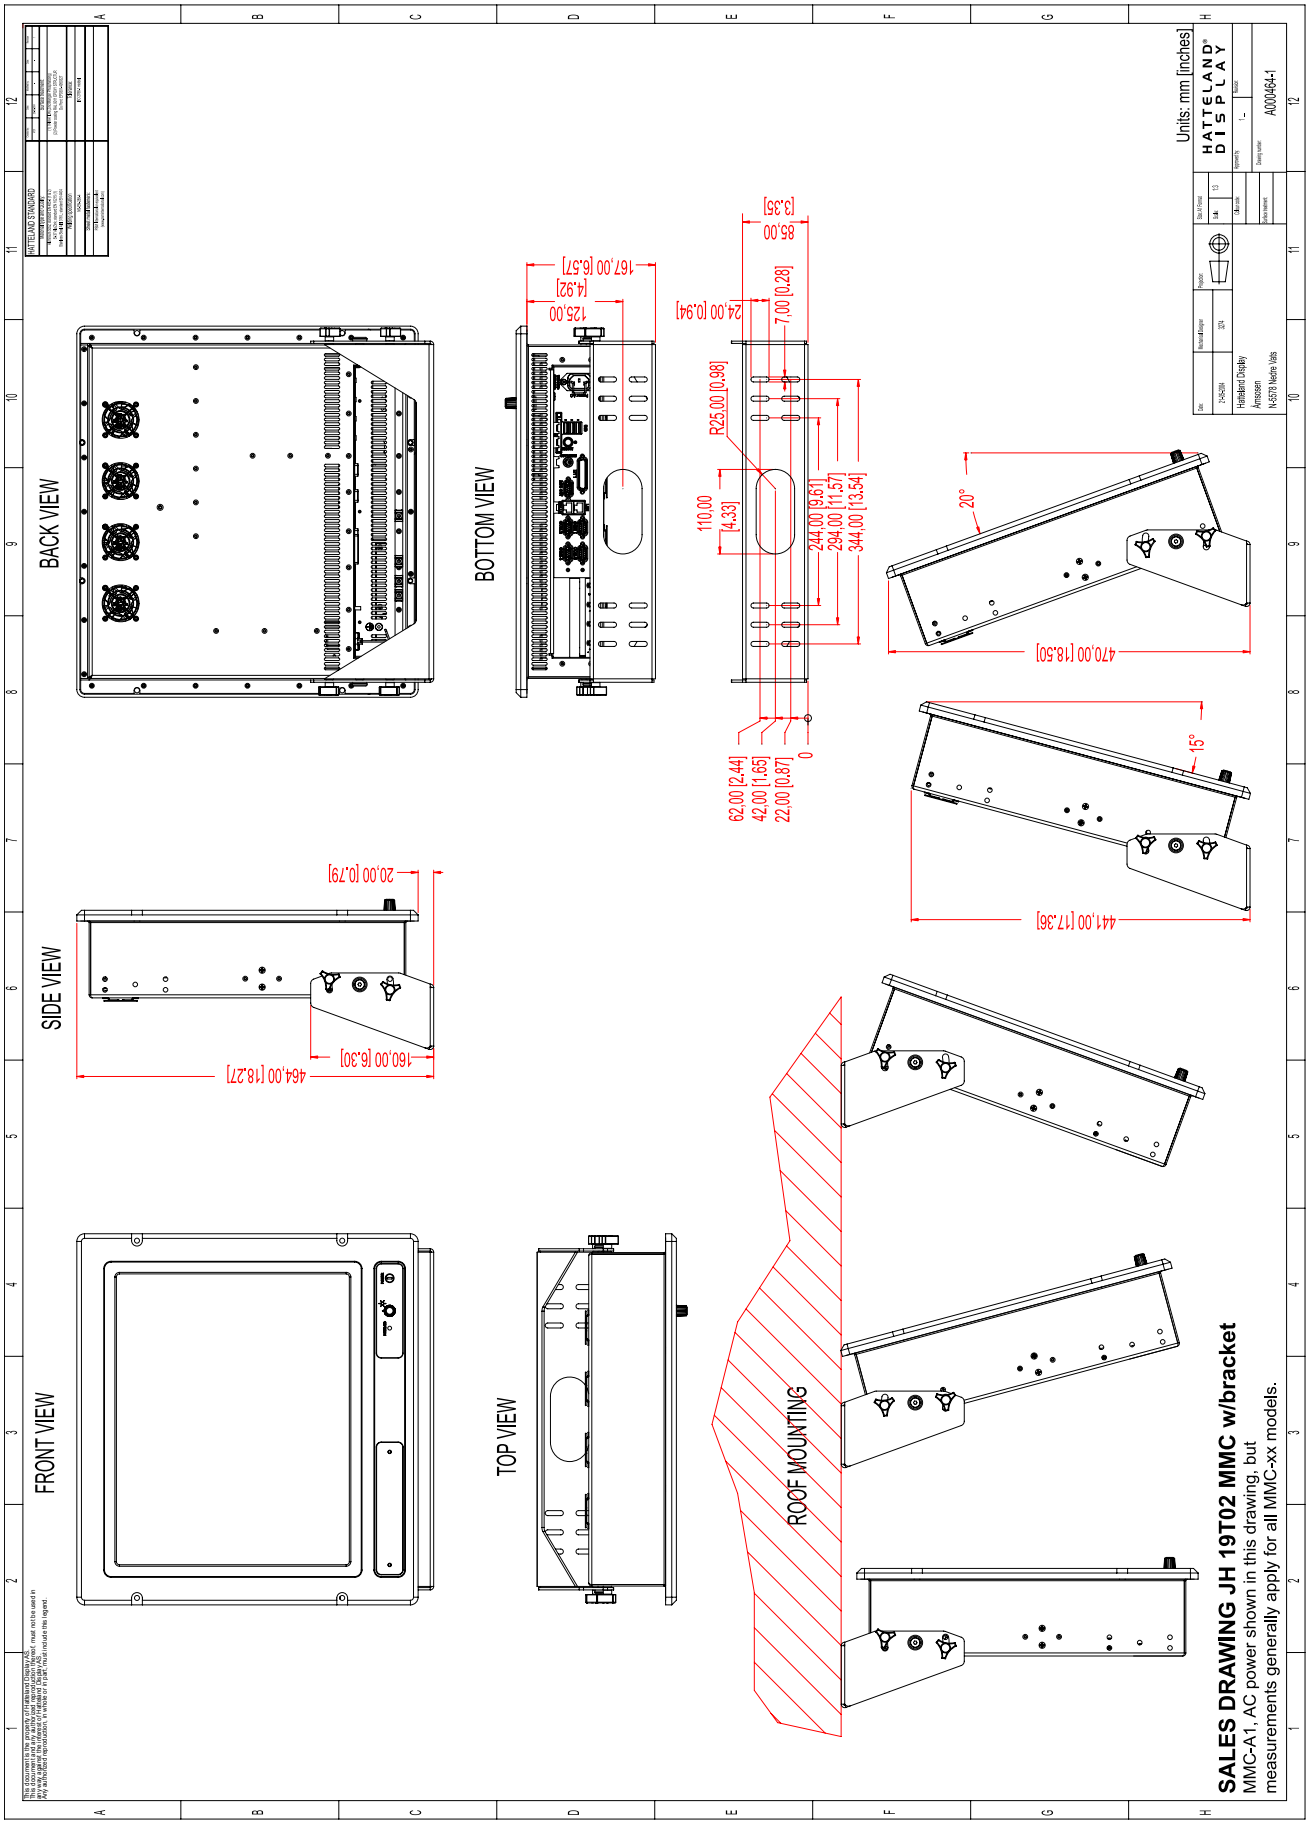

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

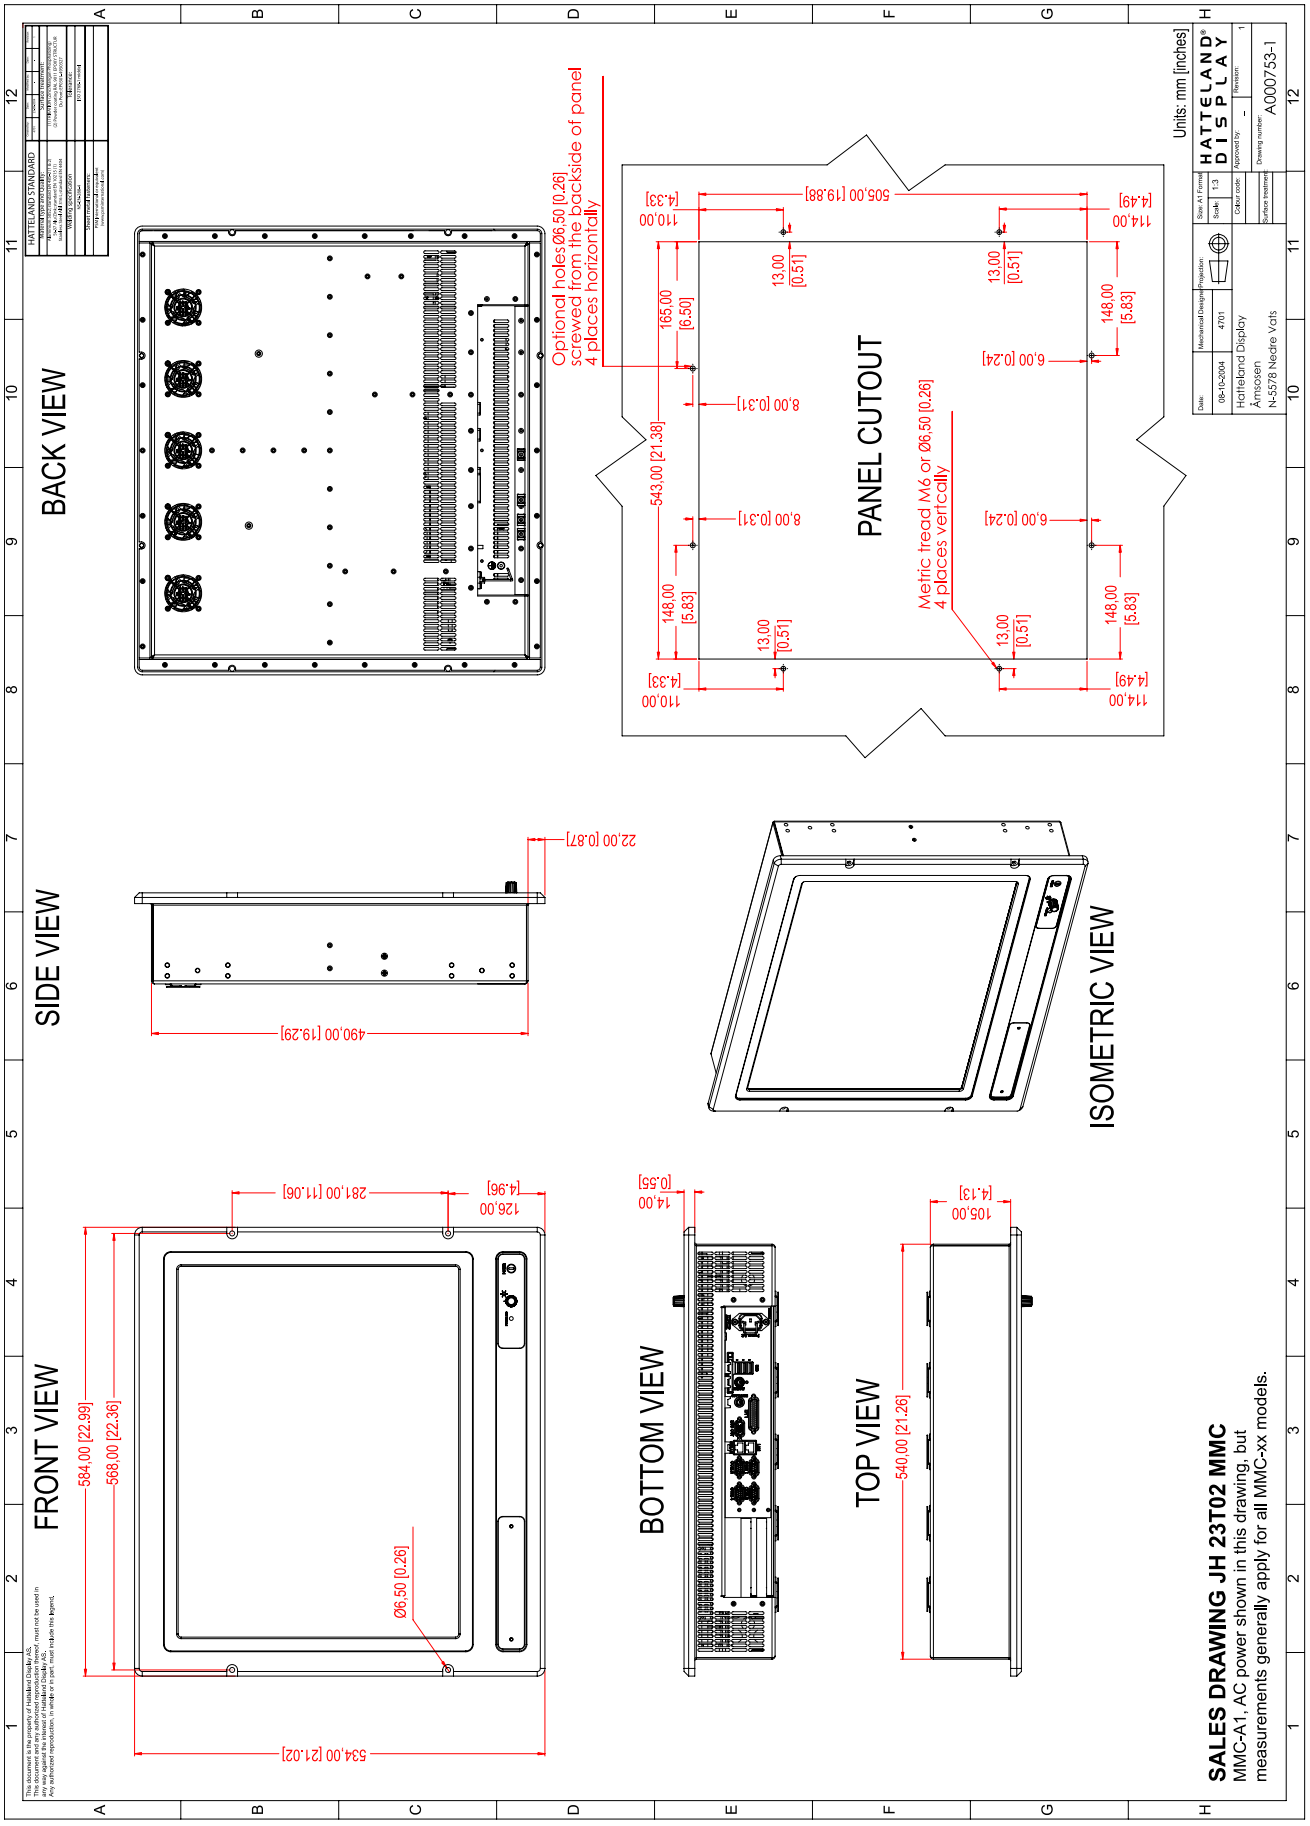
BACK VIEW
SIDE VIEW
FRONT VIEW
BOTTOM VIEW
TOP VIEW
ISOMETRIC VIEW
PANEL CUTOUT
Optional holes Ø6,50 [0.26] screwed from the backside of panel 4 places horizontally
Metric tread M6 or Ø6,50 [0.26] 4 places vertcally
Units: mm [inches]
SALES DRAWING JH 23T02 MMC
MMC-A1, AC power shown in this drawing, but measurements generally apply for all MMC-xx models.
HATTELAND DISPLAY
Hatteland Display
Åmsosen
N-5578 Nedre Vats
A000753-1

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS, and must not be distributed to any third party without written permission. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

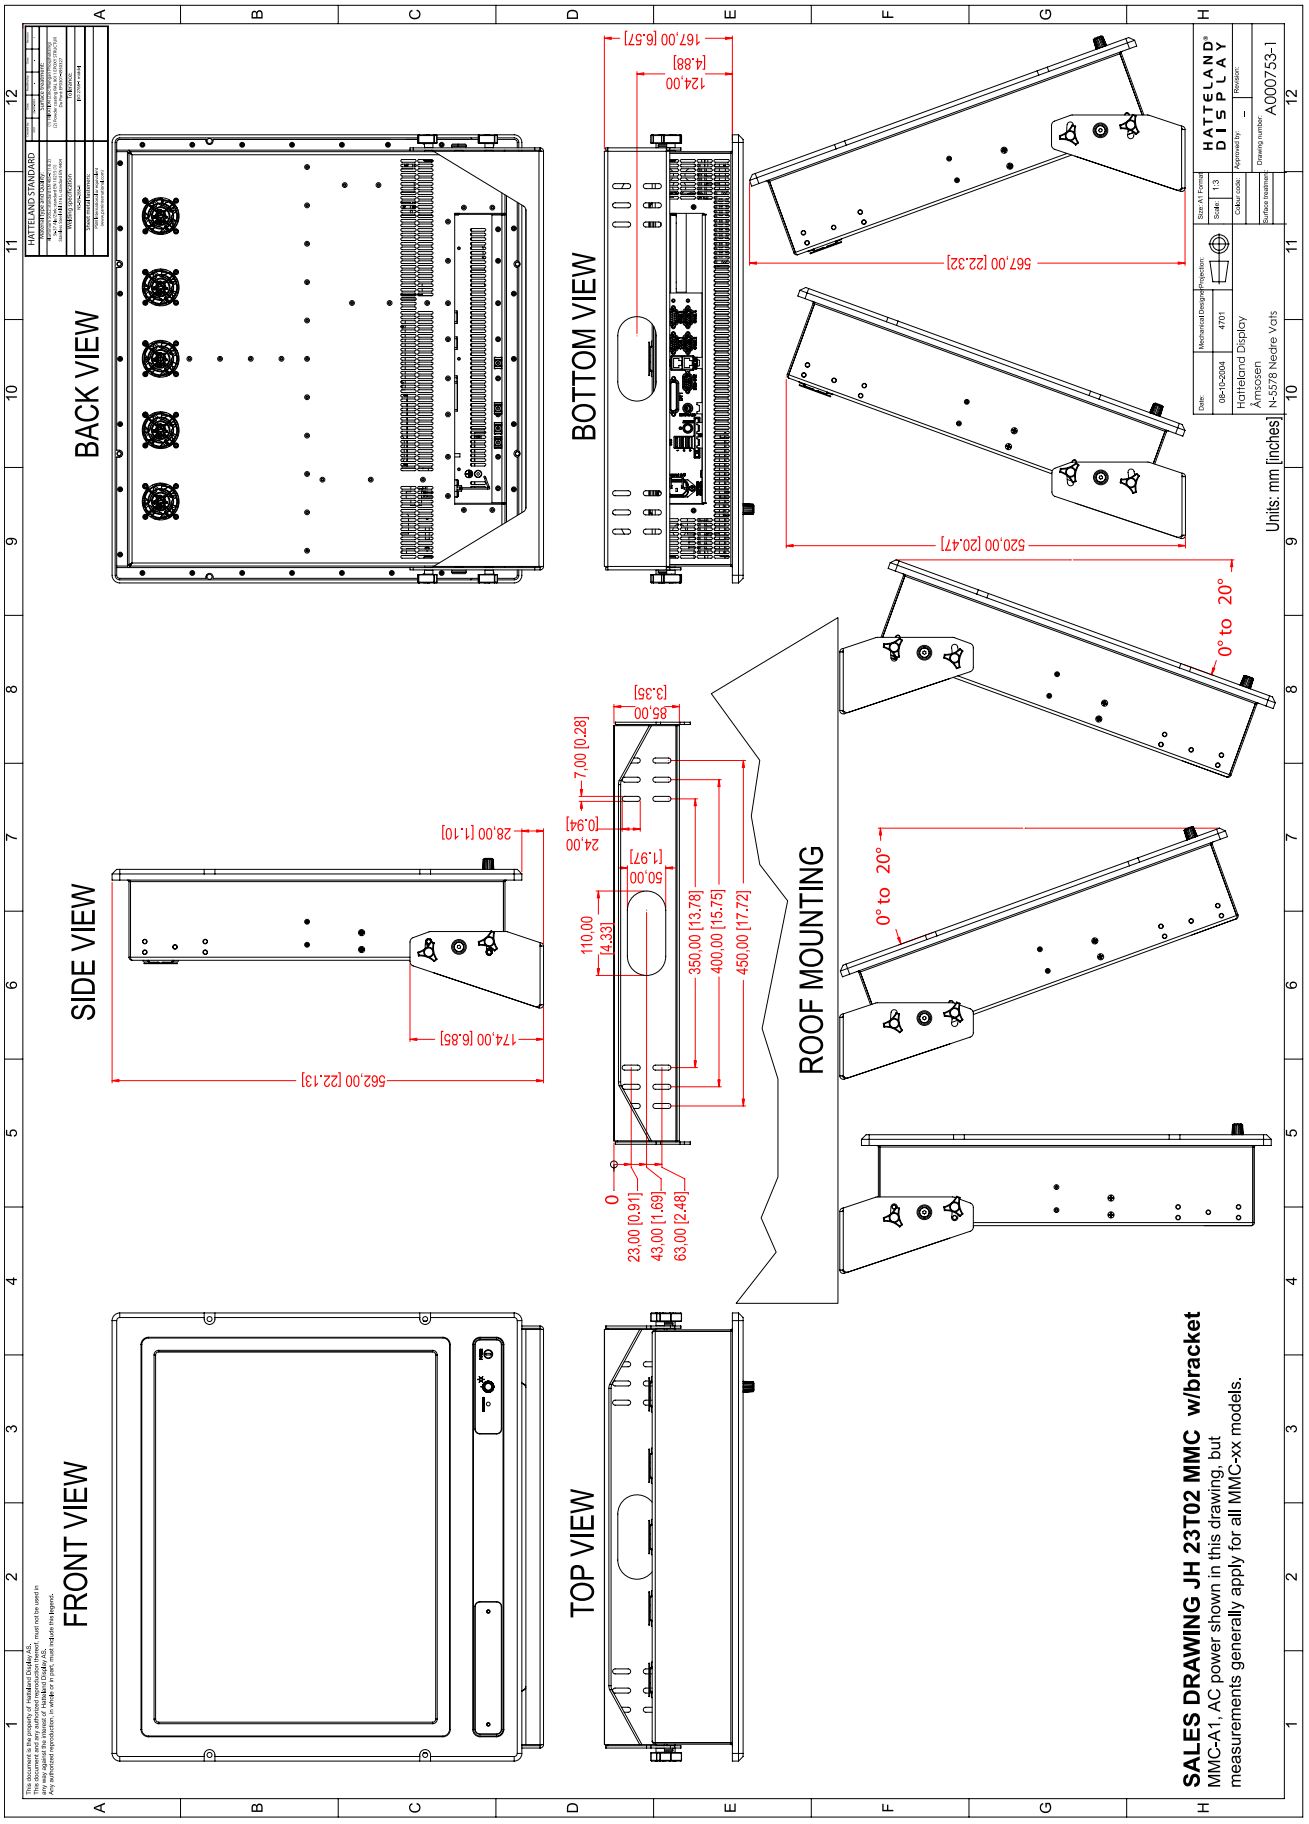

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Technical Drawings - Accessories

POS	NUMBER	DESCRIPTION	SIZE
1	1	Suspension Bracket	
2	6	Nylon Washer Microplastic	6mm
3	2	Flat Washer	6 mm
4	2	Shoulder Washer	6 mm
5	2	Bolt DIN7991	M6X1X20
6	4	Rencol Tristar Knob	M6X10 mm

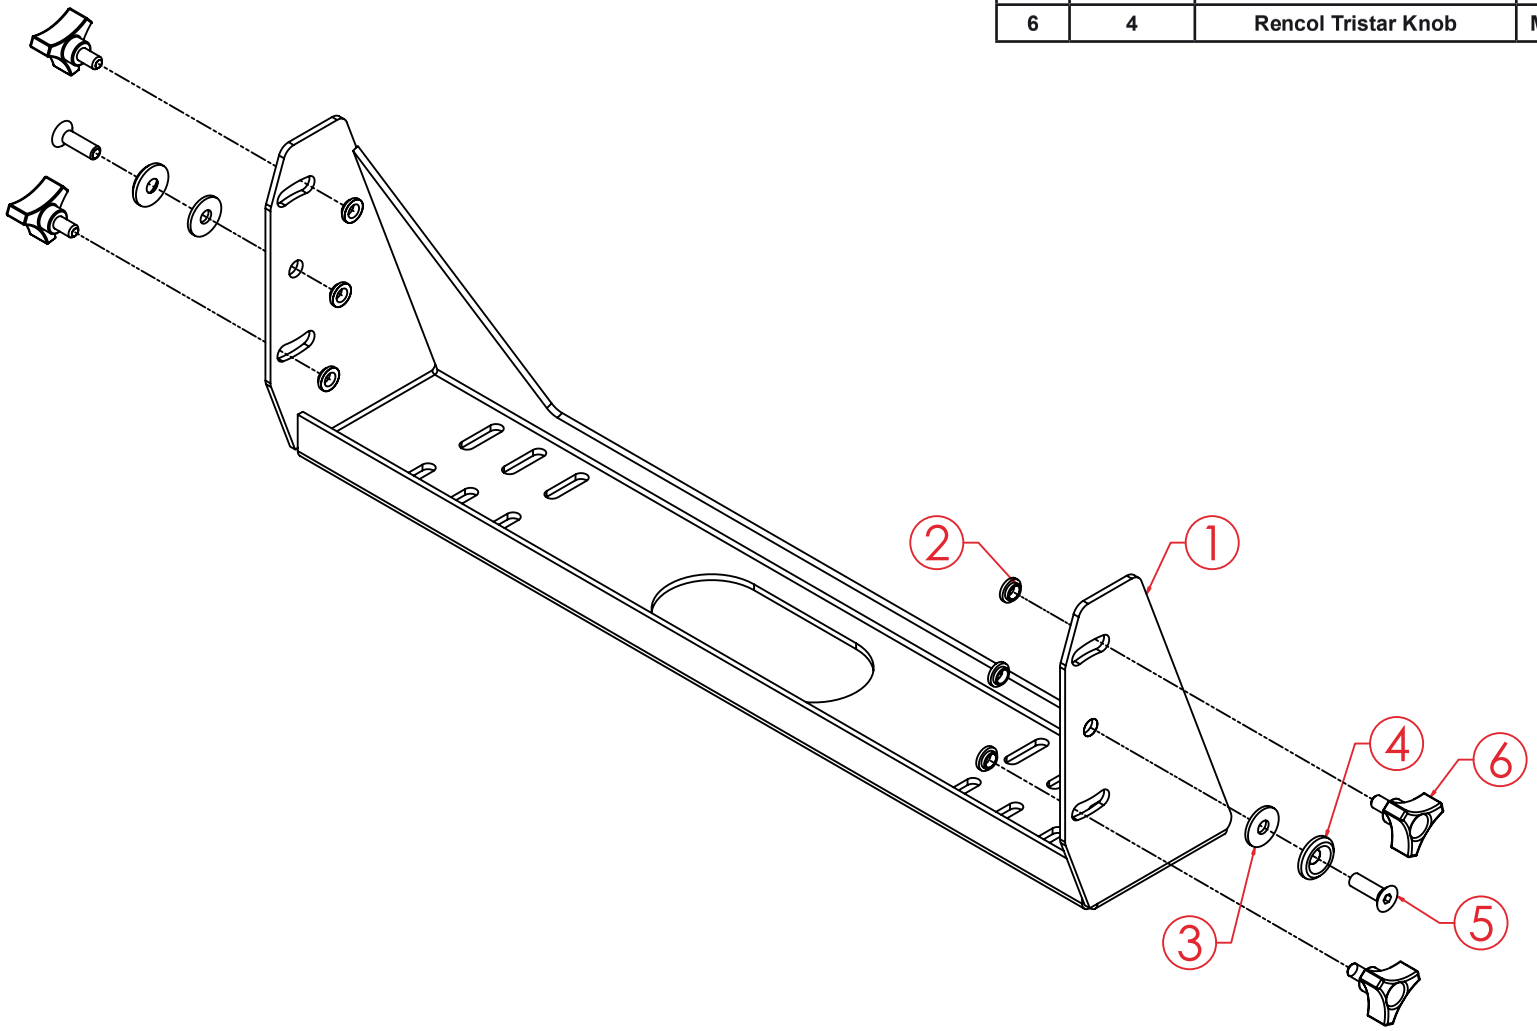

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS.
Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

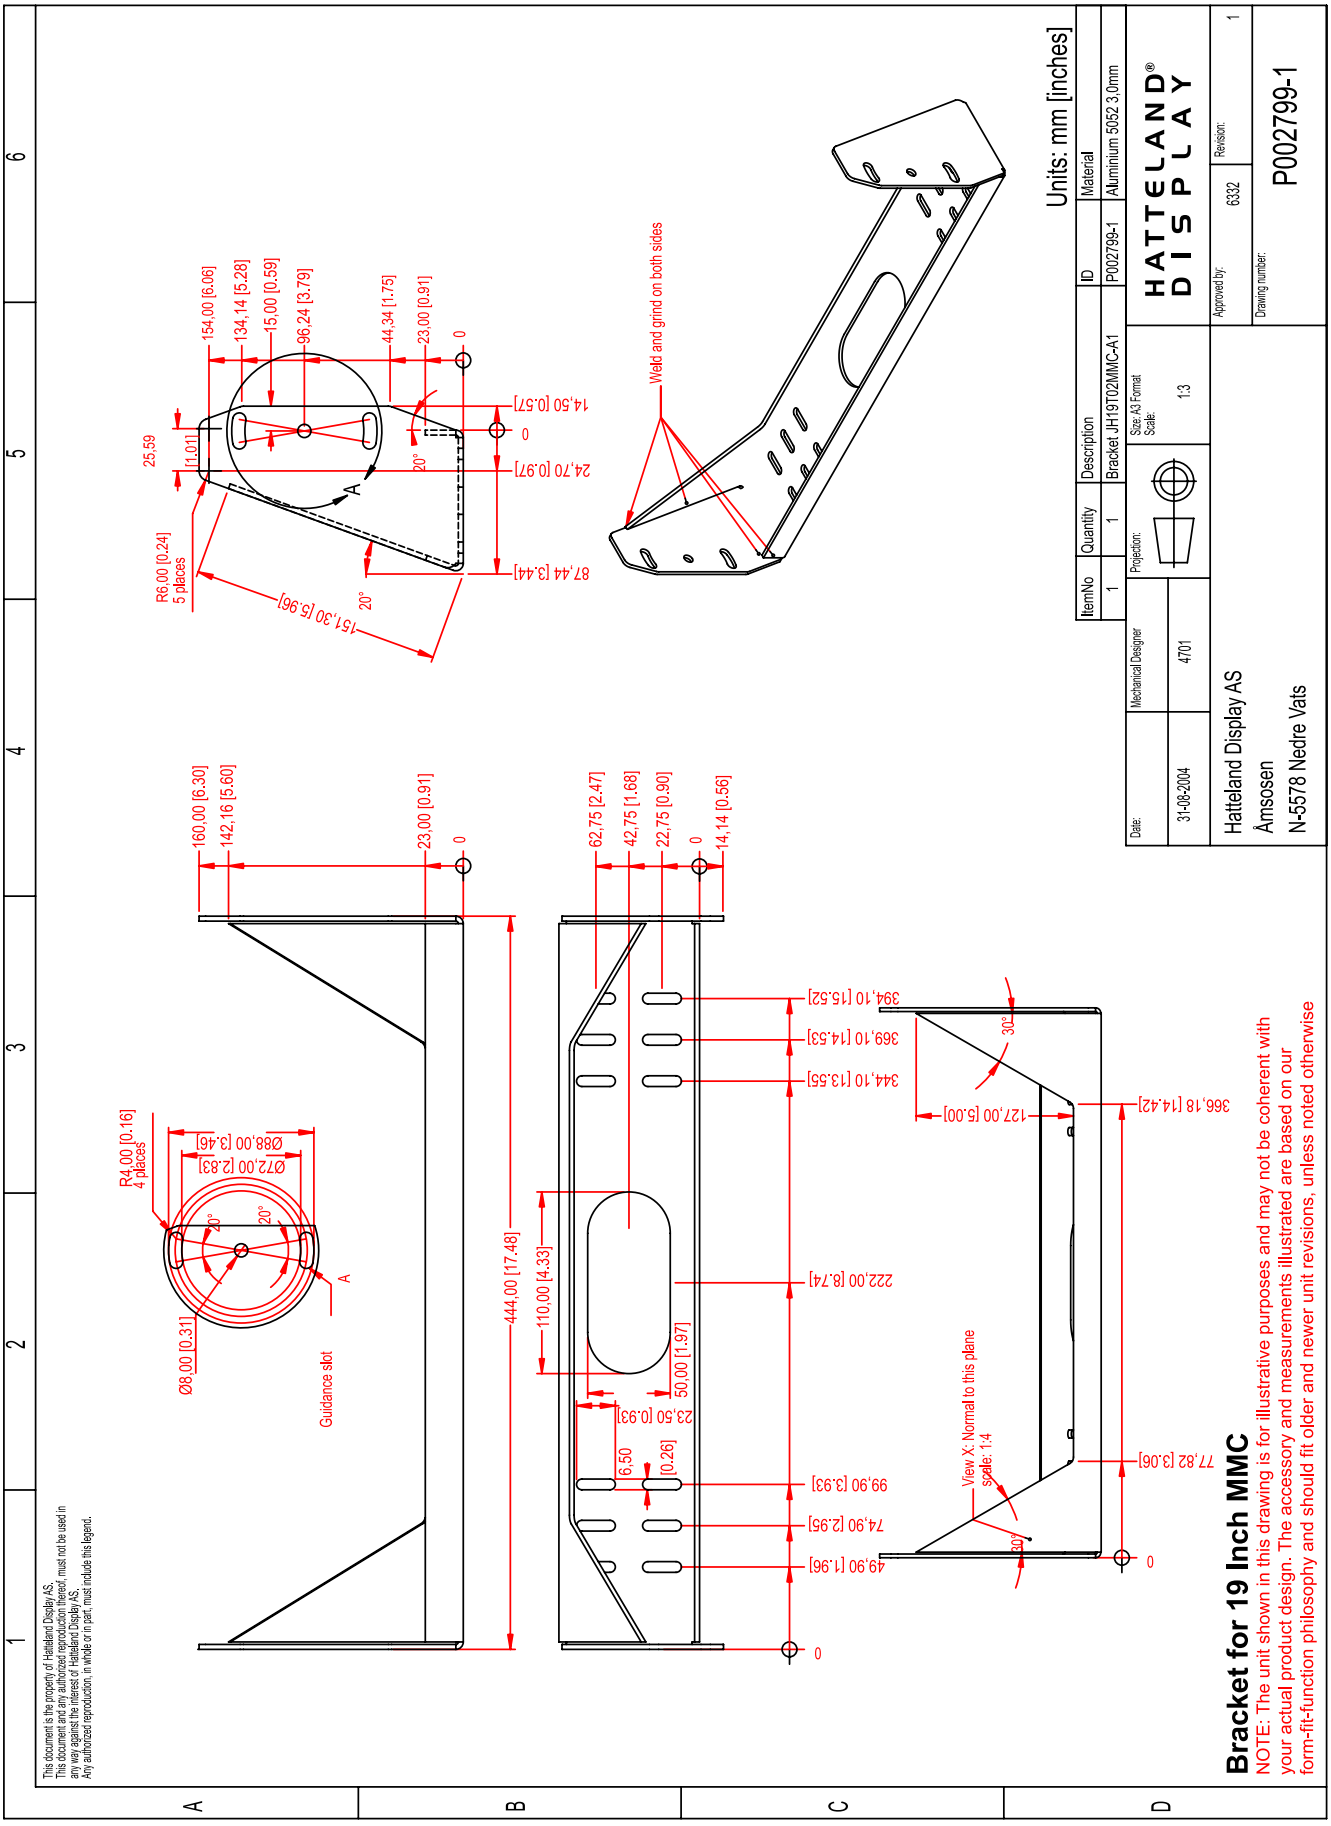

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

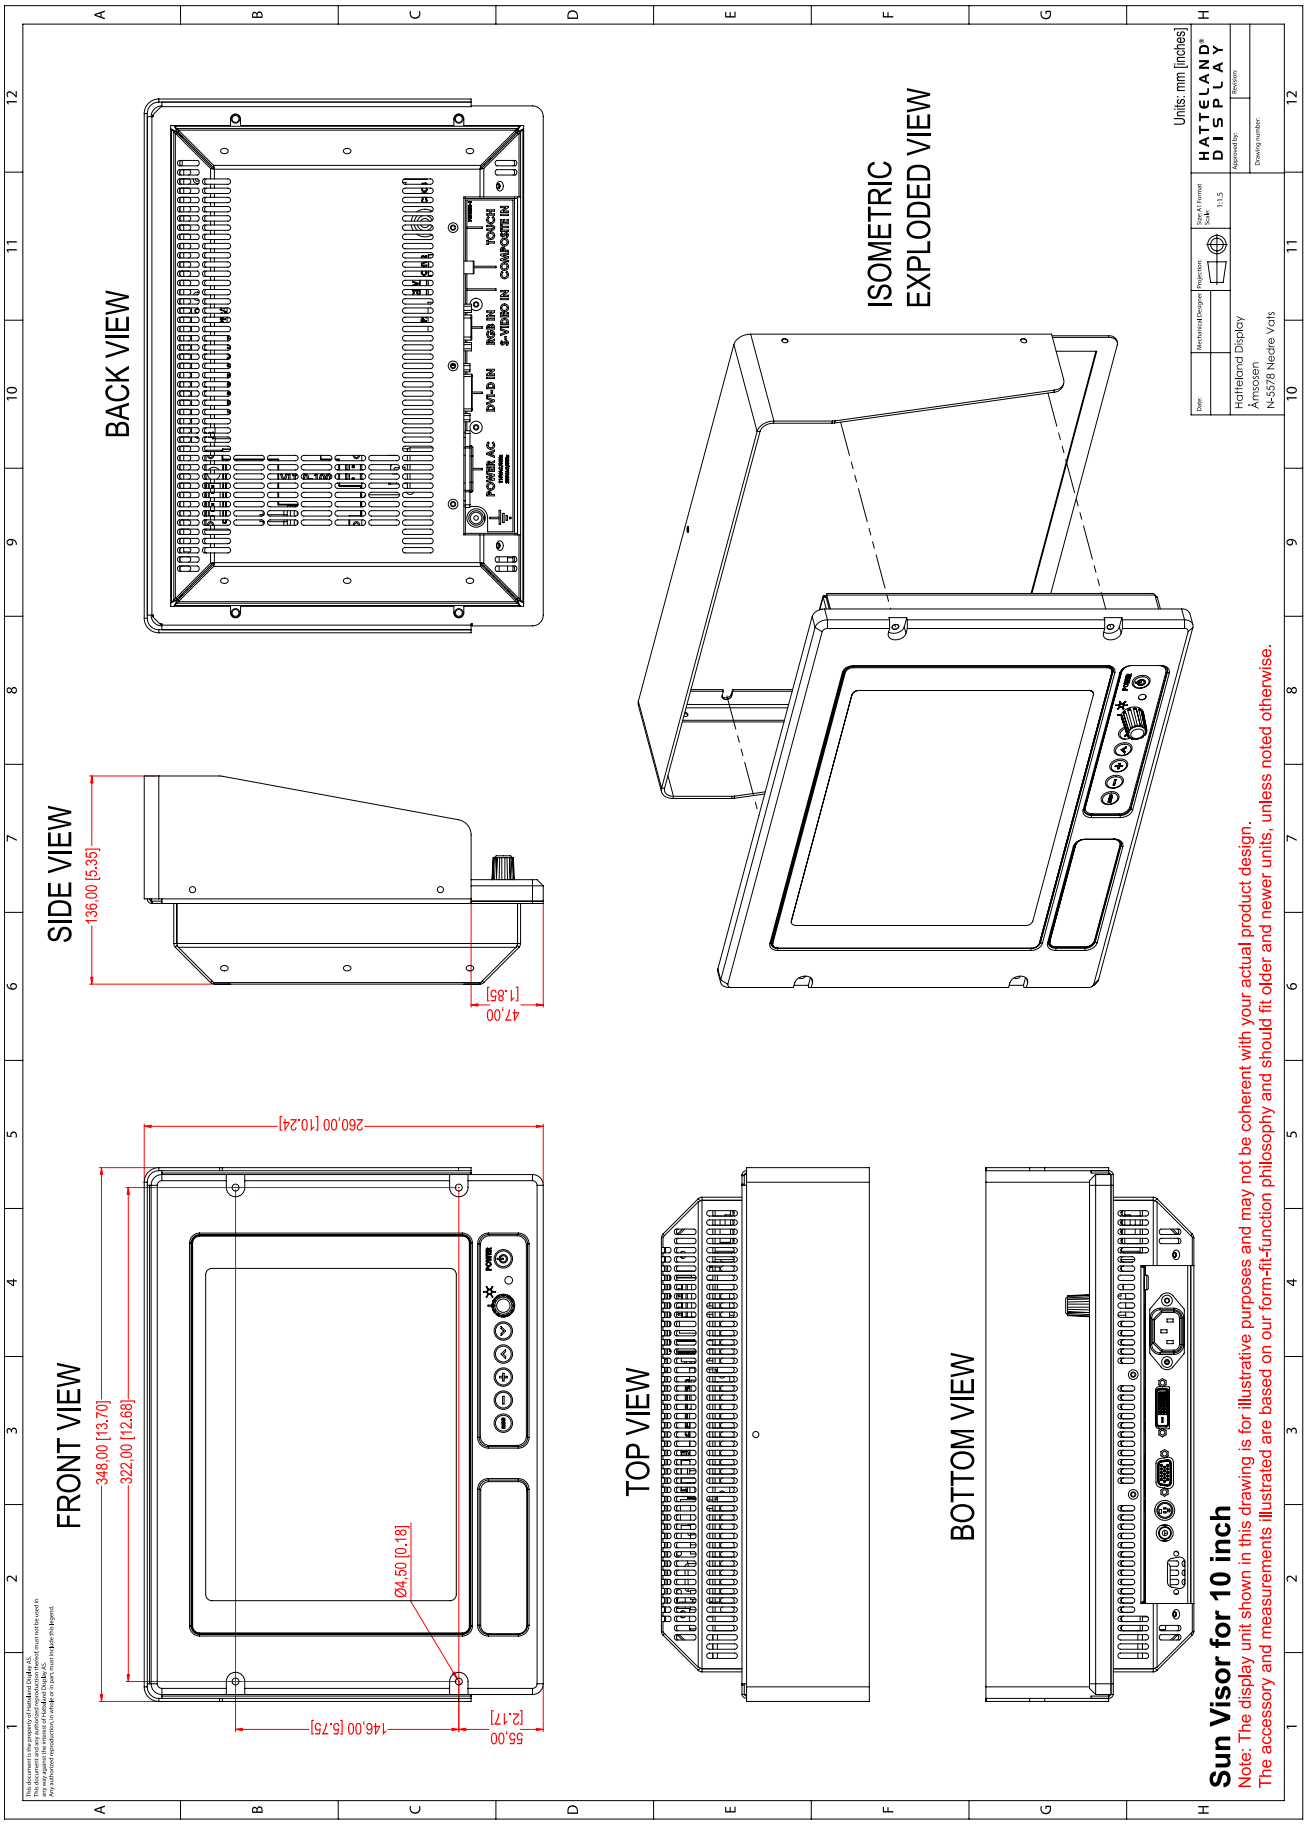

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS, must include this legend, must not be distributed to any third party without written permission. Any authorized reproduction, in whole or in part, must include this legend.

This document is the property of Hatteland Display AS.
This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS.
Any authorized reproduction, in whole or in part, must include this legend.

HATTELAND STANDARD

Material type and Quality:	Surface treatment:
Aluminium 5052 standard EN 485-2 / 6-2	ISO 7599/EN (Electrolytic Phosphatizing)
Steel AISI 304L standard EN 10213 / 10	CE Powder coating RAL 9011 EPOXY COLOUR
Stainless Steel AISI 316 L standard EN 4404	UL Polyester QP2004 w4900027
Welding specification:	Tolerance:
ISO 5817 class C	ISO 2768-1 - middle
Sheet metal fasteners:	
PEM® fasteners or equivalent (www.pemnet.eu/Europe)	

FRONT VIEW

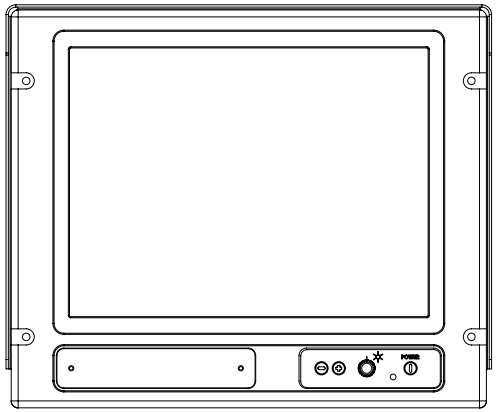

SIDE VIEW

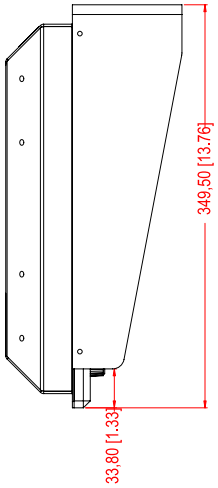

BACK VIEW

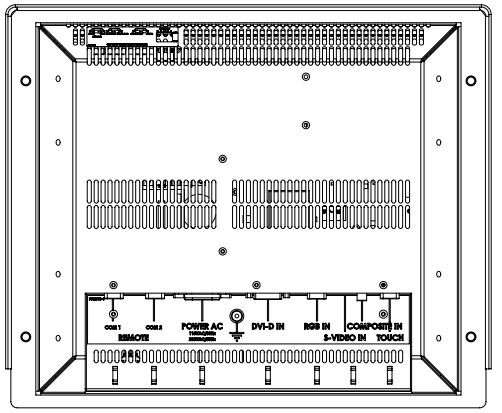

BOTTOM VIEW

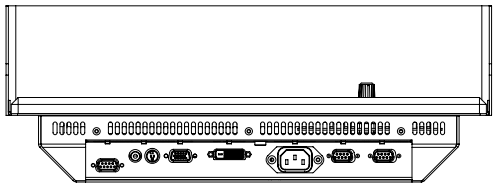

TOP VIEW

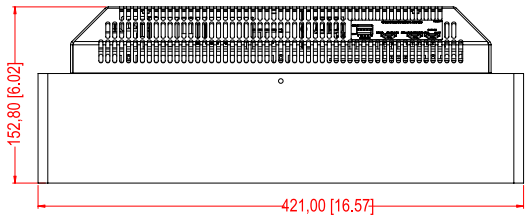

DIMETRIC EXPLODED VIEW

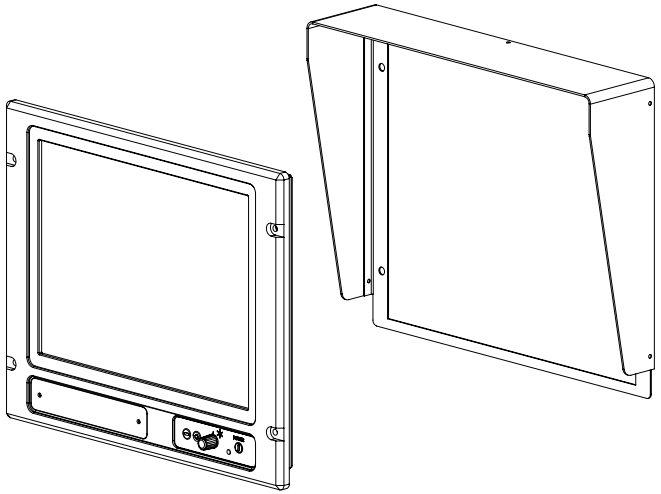

Units: mm [inches]

Sun Visor for 15 inch

NOTE: The display unit shown in this drawing is for illustrative purposes only and may not be coherent with your actual product design.
The accessory and measurements illustrated are based on our form-fit-function philosophy and should fit older and newer display revisions, unless noted otherwise.

Date:	Mechanical Designer	Projection:	Size: A1 Format	HATTELAND DISPLAY
01-04-2005	6332		Scale: 1:2	
Hatteland Display Åmsosen N-5578 Nedre Vats			Colour code: / Surface treatment:	Approved by: _ / Revision: 1
				Drawing number: A000728-1

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS.
Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

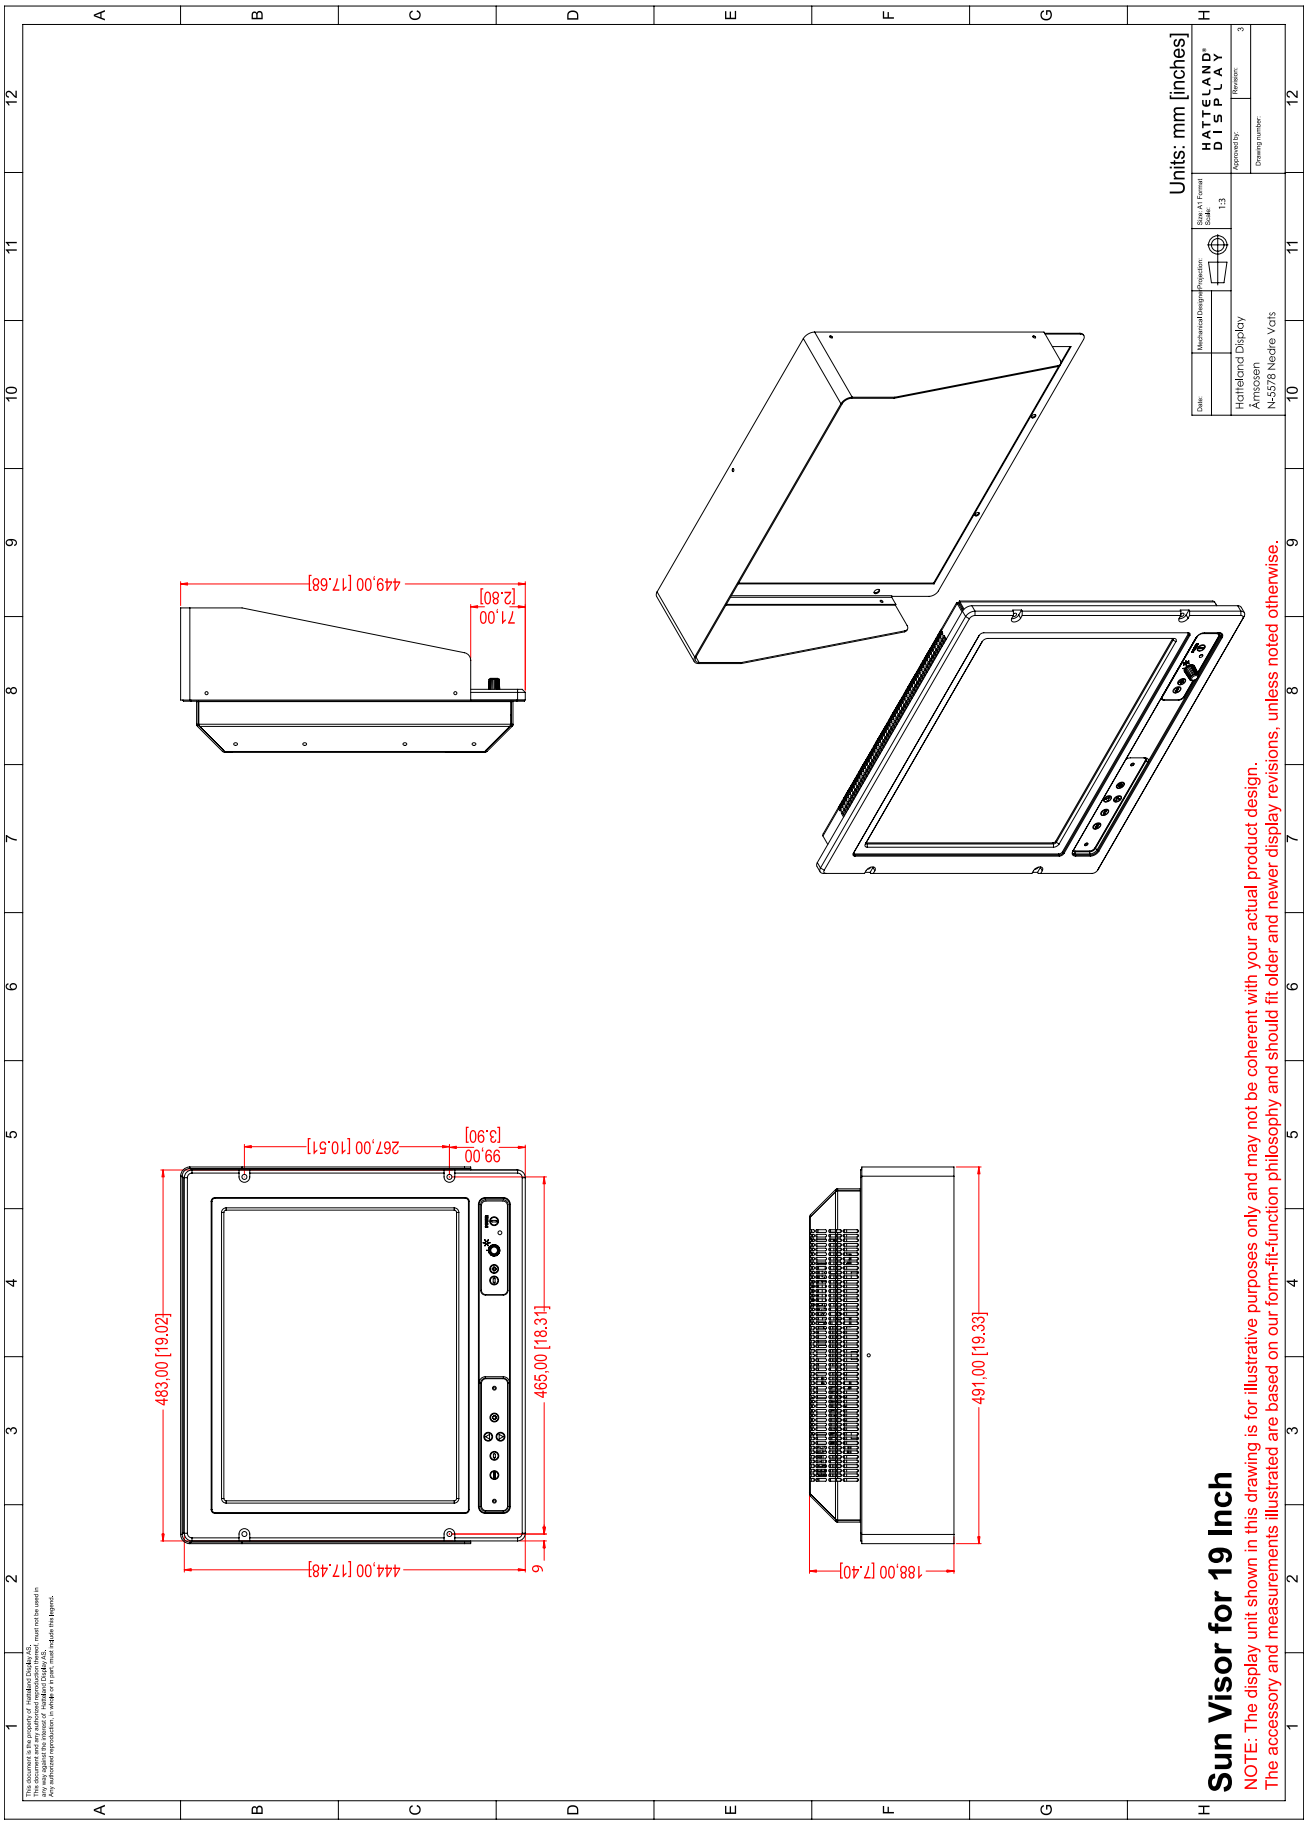
Units: mm [inches]
Sun Visor for 19 Inch
NOTE: The display unit shown in this drawing is for illustrative purposes only and may not be coherent with your actual product design.
The accessory and measurements illustrated are based on our form-fit-function philosophy and should fit older and newer display revisions, unless noted otherwise.
Hatteland Display
Åmsosen
N-5578 Nedre Vats
449,00 [17.68]
71,00 [2.80]
267,00 [10.51]
99,00 [3.90]
483,00 [19.02]
465,00 [18.31]
444,00 [17.48]
491,00 [19.33]
188,00 [7.40]

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

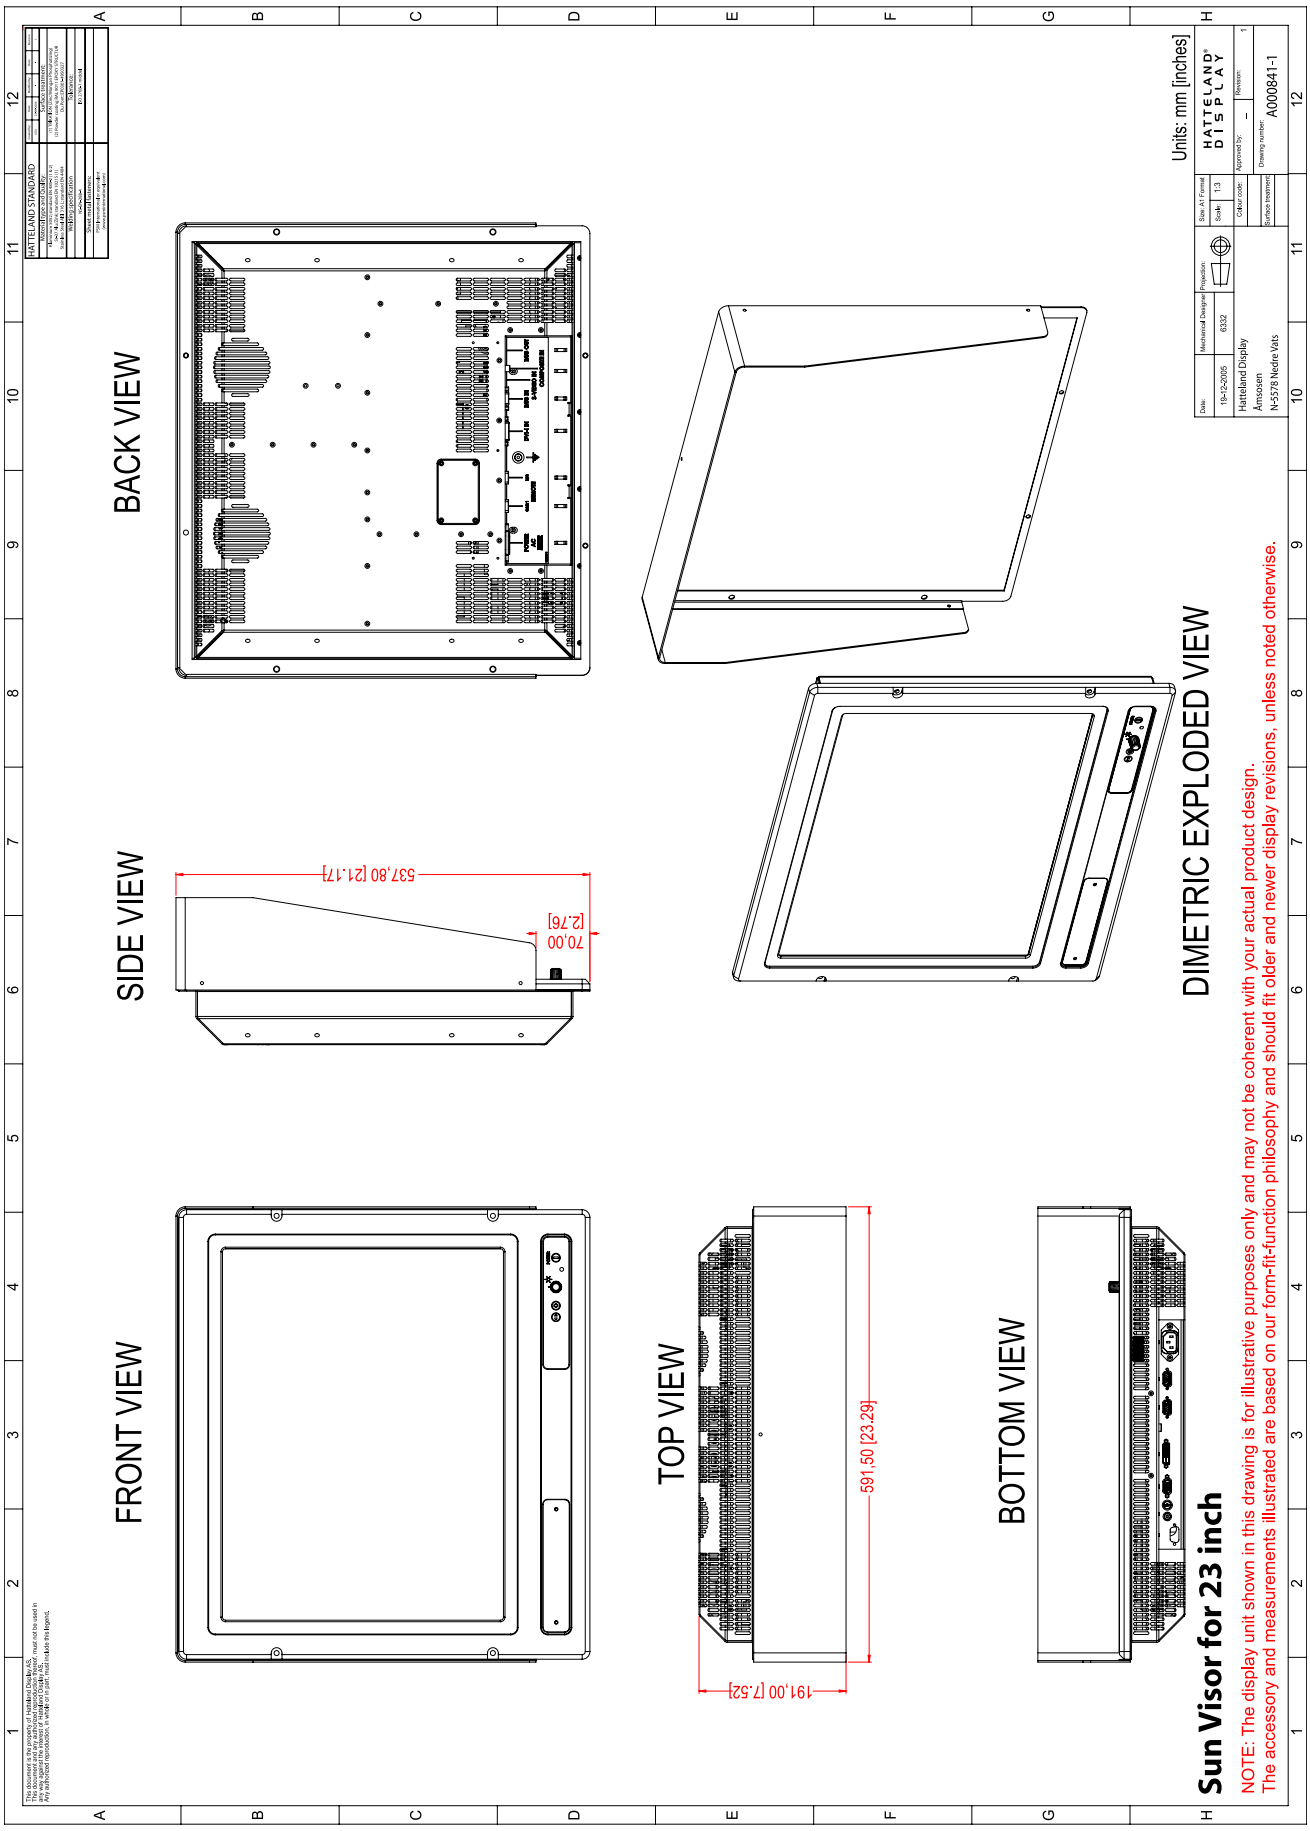
BACK VIEW
SIDE VIEW
537,80 [21.17]
70,00 [2.76]
FRONT VIEW
TOP VIEW
591,50 [23.29]
191,00 [7.52]
BOTTOM VIEW
DIMETRIC EXPLODED VIEW
Units: mm [inches]
Sun Visor for 23 inch
NOTE: The display unit shown in this drawing is for illustrative purposes only and may not be coherent with your actual product design.
The accessory and measurements illustrated are based on our form-fit-function philosophy and should fit older and newer display revisions, unless noted otherwise.
HATTELAND DISPLAY
Hatteland Display
Åmosen
N-5578 Nedre Vats
A000841-1

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

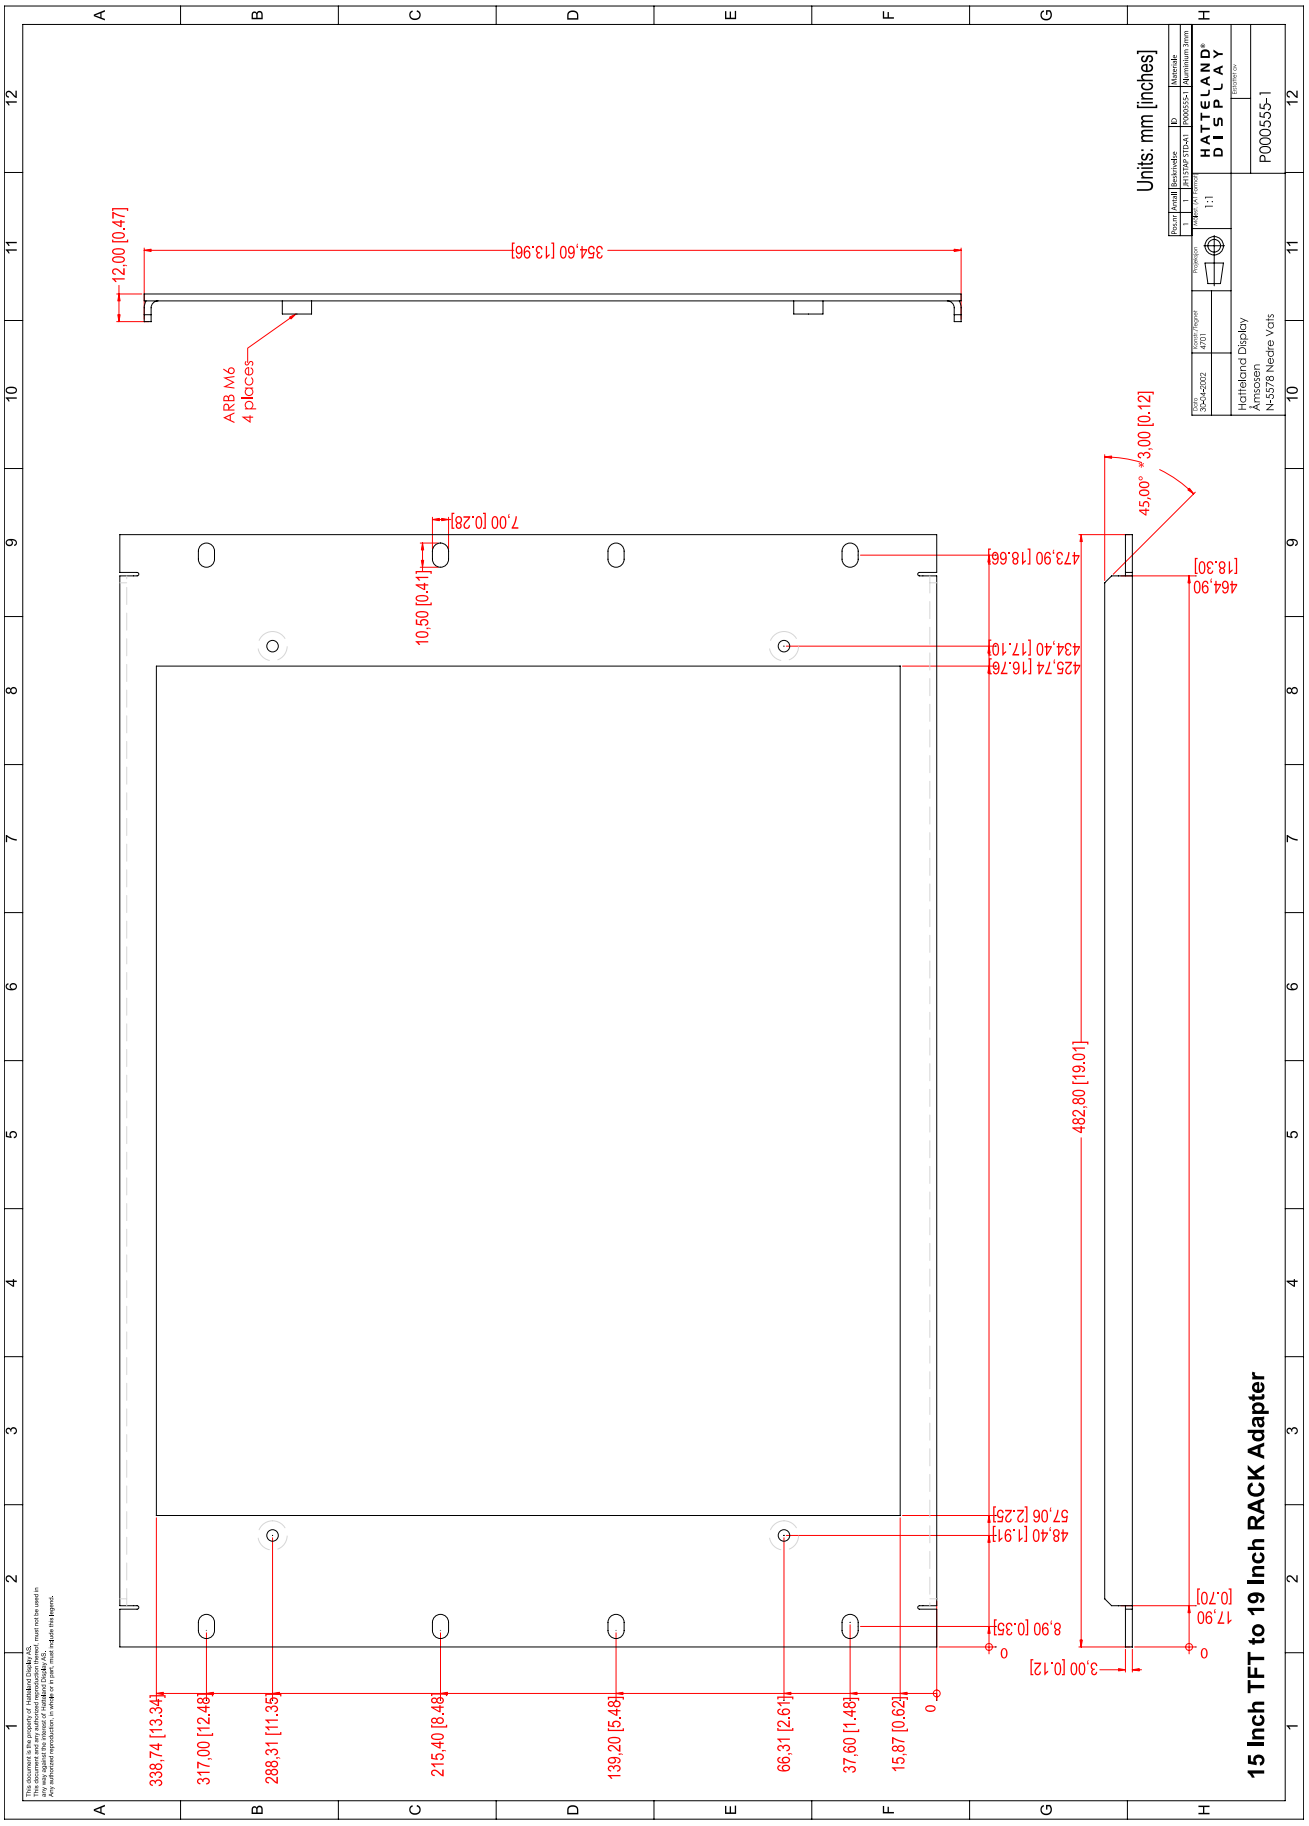

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

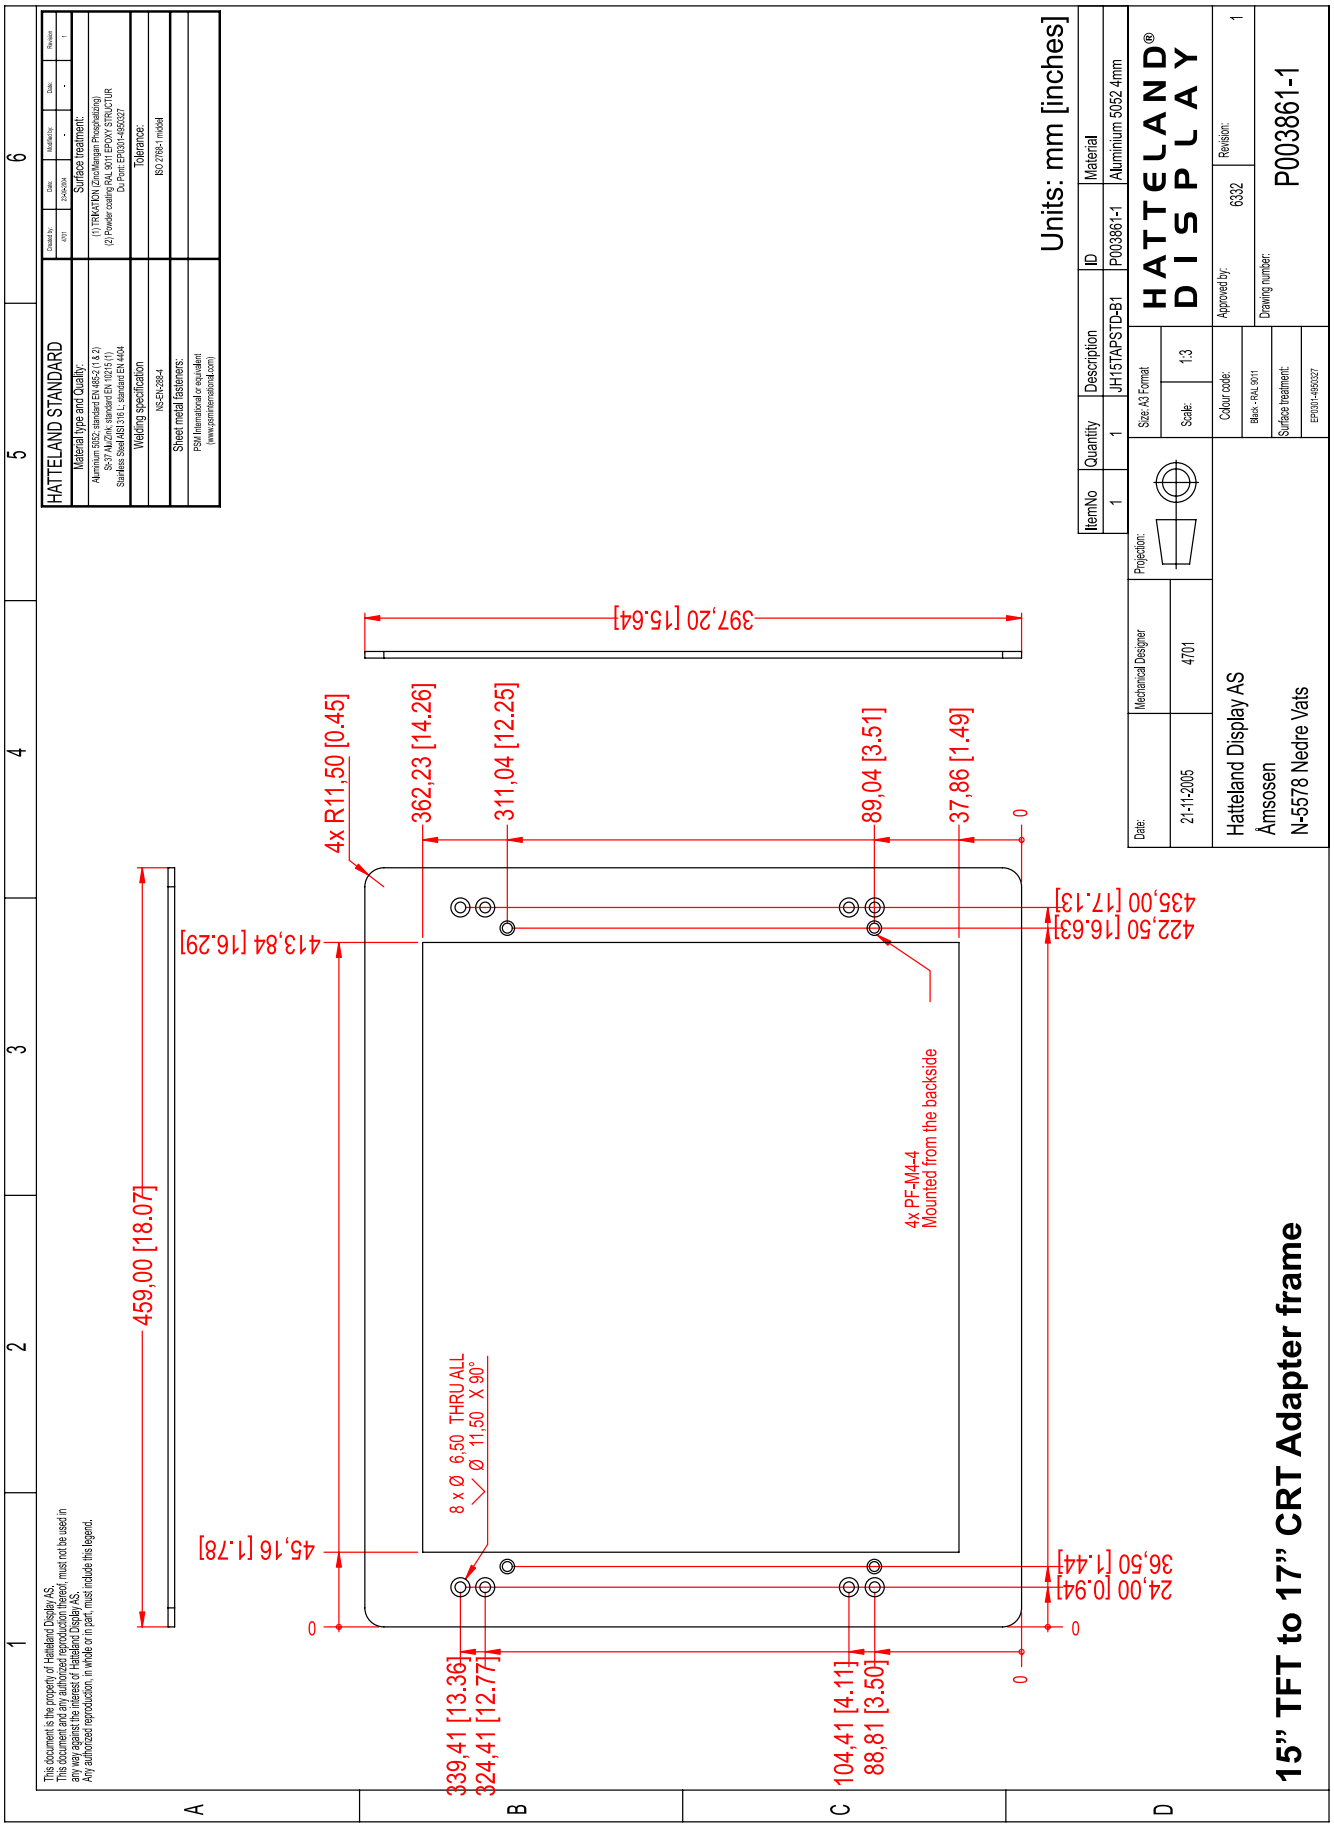

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.

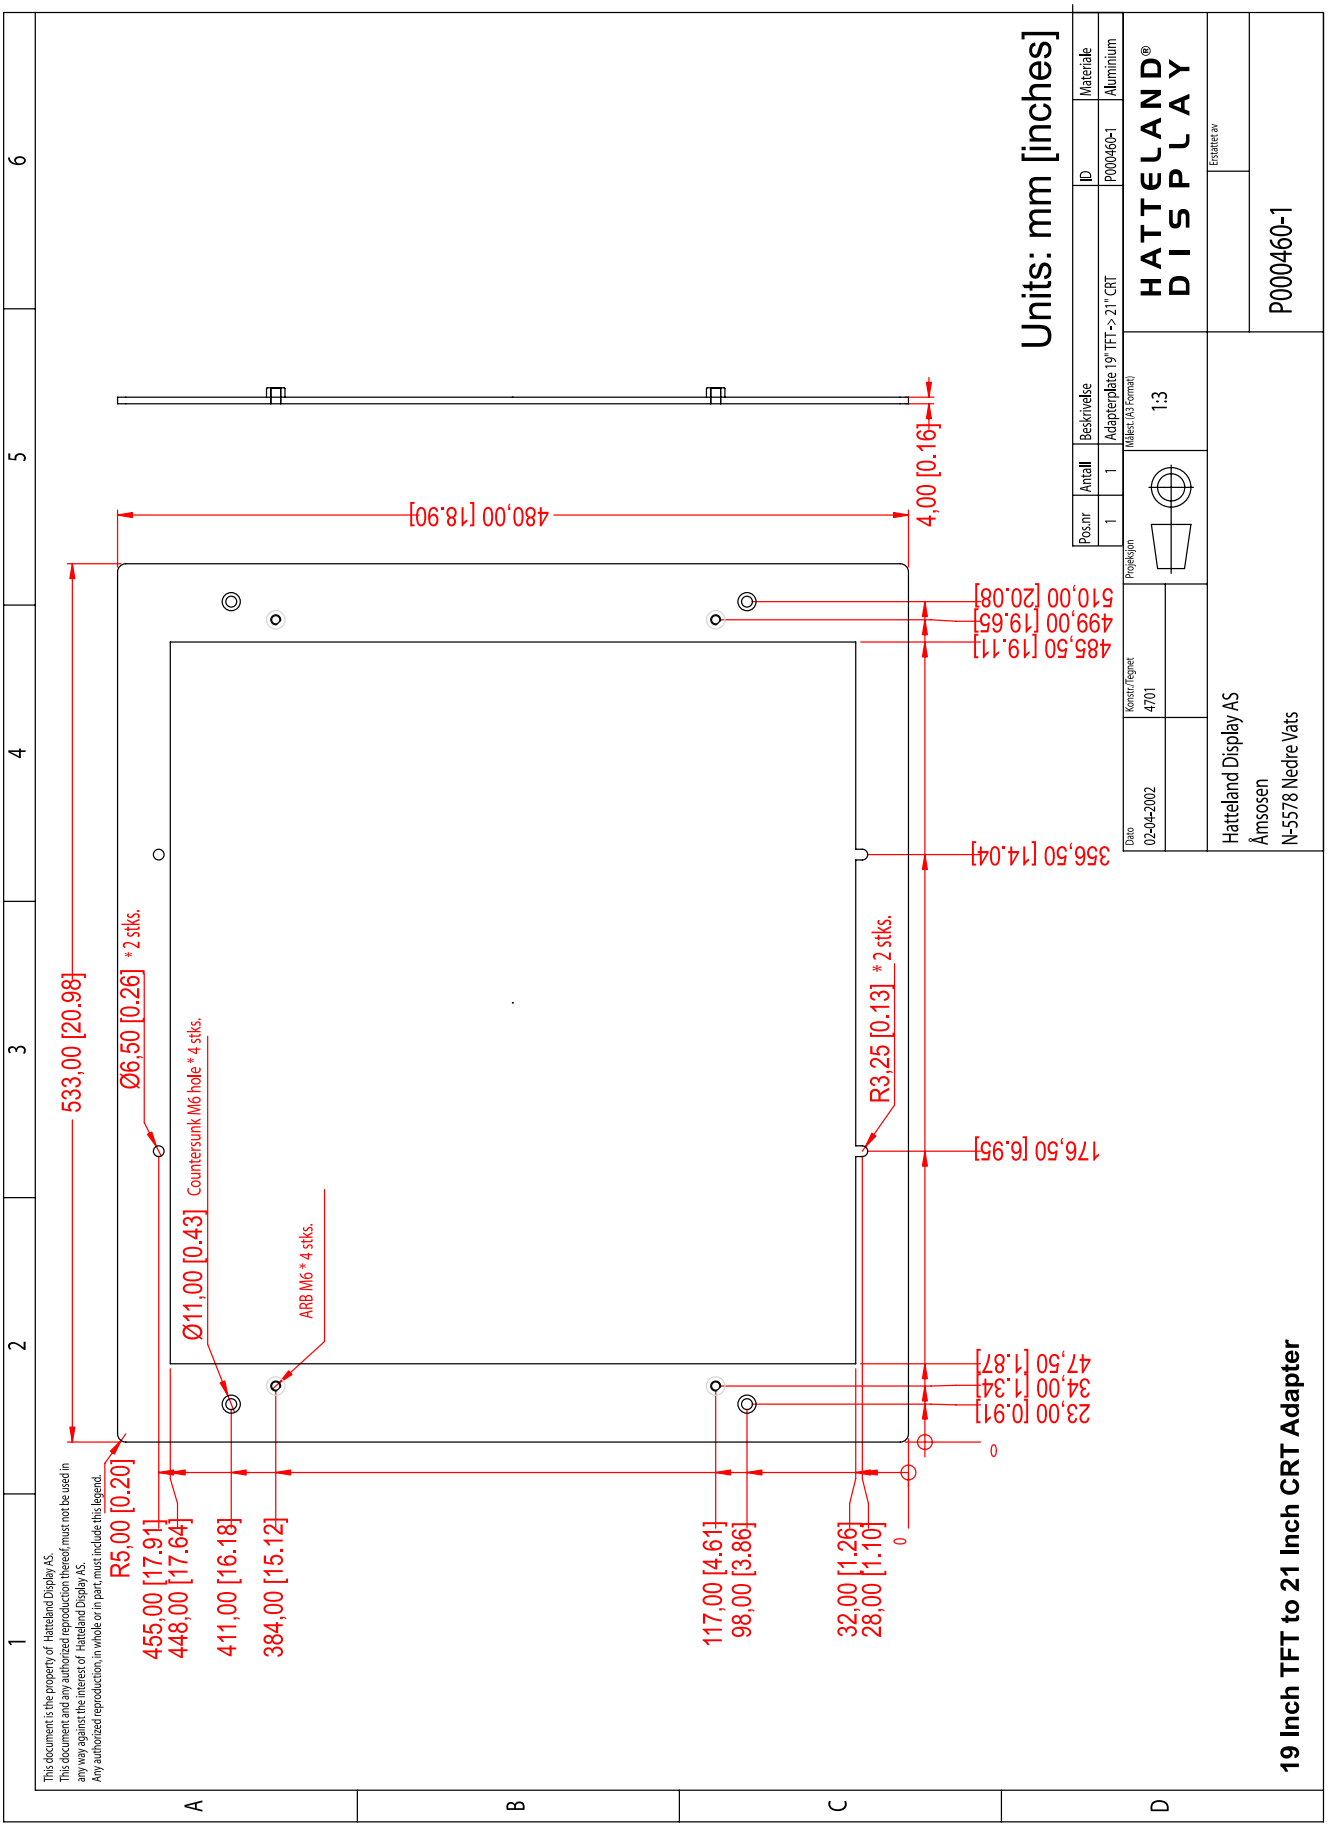

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend.

This document is the property of Hatteland Display AS. This document and any authorized reproduction thereof, must not be used in any way against the interest of Hatteland Display AS. Any authorized reproduction, in whole or in part, must include this legend. Hatteland Display Proprietary information. Not to be distributed to any third party without written permission.

Appendixes

Pin Assignments - Common Connectors

Note: Not all connectors may be available on your specific product. This depends on the amount of additional hardware installed from factory, or customized solutions. These pin assignments are for the common connectors used. Connectors are seen from users Point Of View (POV).

Pin Assignments - RJ45 10/100 LAN



Pin 01 - TDP	Transmit Differential Pair (Positive)
Pin 02 - TDN	Transmit Differential Pair (Negative)
Pin 03 - RDP	Receive Differential Pair (Positive)
Pin 04 - NC	Not Connected
Pin 05 - NC	Not Connected
Pin 06 - RDN	Receive Differential Pair (Negative)
Pin 07 - NC	Not Connected
Pin 08 - NC	Not Connected

Use category 5 - twisted pair cable

Pin Assignments - RJ45 10/100/1000 GBLAN



Pin 01 - D0P	Differential Pair 0 (Positive)
Pin 02 - D0N	Differential Pair 0 (Negative)
Pin 03 - D1P	Differential Pair 1 (Positive)
Pin 04 - D2P	Differential Pair 2 (Positive)
Pin 05 - D2N	Differential Pair 2 (Negative)
Pin 06 - D1N	Differential Pair 1 (Negative)
Pin 07 - D3P	Differential Pair 3 (Positive)
Pin 08 - D3N	Differential Pair 3 (Negative)

Pin Assignments - 15P HD RGB VGA



Pin 01	Red, analog
Pin 02	Green, analog
Pin 03	Blue, analog
Pin 04	Reserved for monitor ID bit 2 (grounded)
Pin 05	Digital ground
Pin 06	Analog ground red
Pin 07	Analog ground green
Pin 08	Analog ground blue
Pin 09	+5V power supply for DDC (optional)
Pin 10	Digital ground
Pin 11	Reserved for monitor ID bit 0 (grounded)
Pin 12	DDC serial data
Pin 13	Horizontal sync or composite sync, input
Pin 14	Vertical sync, input
Pin 15	DDC serial clock

Pin Assignments - 9P Serial COM RS232

This connector is commonly used for:
Serial Remote Control Interface (SCOM) and
Touch Screen communication.



Pin 01 - DCD	Data Carry Detect
Pin 02 - SIN	Serial In or Receive Data
Pin 03 - SOUT	Serial Out or Transmit Data
Pin 04 - DTR	Data Terminal Ready
Pin 05 - GND	Ground
Pin 06 - DSR	Data Set Ready
Pin 07 - RTS	Request To Send
Pin 08 - CTS	Clear To Send
Pin 09 - RI	Ring Indicate

Pin Assignments - USB TYPE A



Pin Assignments - USB TYPE B

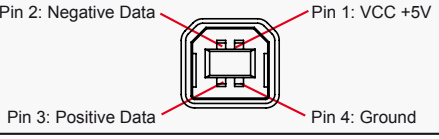

Pin Assignments - 5P PS/2 MOUSE

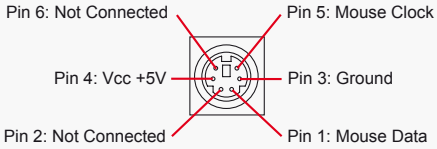

Pin Ass. - 5P PS/2 KEYBOARD+MOUSE Combined

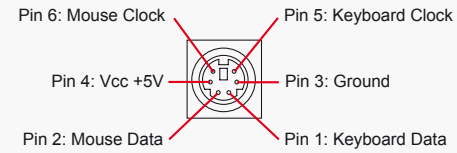

Pin Assignments - 5P PS/2 KEYBOARD

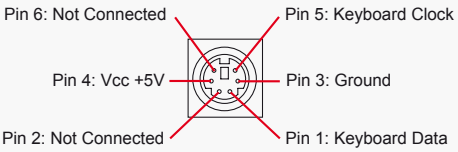

Pin Assignments - FIREWIRE IEEE-1394



Pin 01 - VCC	Power
Pin 02 - GND	Grounding for power and inner cable shield
Pin 03 - TPB-	Twisted Pair B- Receive Strobe, Transmit Data
Pin 04 - TPB+	Twisted Pair B+ Receive Strobe, Transmit Data
Pin 05 - TPA-	Twisted Pair A- Transmit Strobe, Receive Data
Pin 06 - TPA+	Twisted Pair A+ Transmit Strobe, Receive Data

Pin Assignments - 5P S-VHS/S-VIDEO

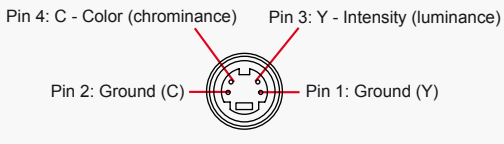

Pin Assignments - RCA/BNC 1P COMP. VIDEO



Pin Assignments - Common Connectors

Pin Assignments - 25P Parallel

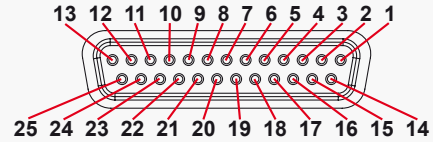

Pin 01 - STROBE	This signal indicates to the printer that data at PD7..0 are valid.
Pin 02 - DATA0	Parallel data bus from PC board to printer. The data line are able to operate in PS/2 compatible bi-directional mode.
Pin 03 - DATA1	Same as Pin 02
Pin 04 - DATA2	Same as Pin 02
Pin 05 - DATA3	Same as Pin 02
Pin 06 - DATA4	Same as Pin 02
Pin 07 - DATA5	Same as Pin 02
Pin 08 - DATA6	Same as Pin 02
Pin 09 - DATA7	Same as Pin 02
Pin 10 - ACK	Signal from printer indicating that the printer has received the data and is ready to accept further data.
Pin 11 - BUSY	Signal from printer indicating that the printer cannot accept further data.
Pin 12 - PE	Signal from printer indicating that the printer is out of paper.
Pin 13 - SELECT	Signal from printer to indicate that the printer is selected.
Pin 14 - AUTO FEED	This active low output causes the printer to add a line feed after each line printed.
Pin 15 - ERR#	Signal from printer indicating that an error has been detected.
Pin 16 - INIT#	This active low output initialises (resets) the printer.
Pin 17 - SLIN#	Signal to select the printer sent from CPU board to printer.
Pin 18 - GND	Ground
Pin 19 - GND	Ground
Pin 20 - GND	Ground
Pin 21 - GND	Ground
Pin 22 - GND	Ground
Pin 23 - GND	Ground
Pin 24 - GND	Ground
Pin 25 - GND	Ground

Pin Assignments - 24P DVI-D & DVI-I

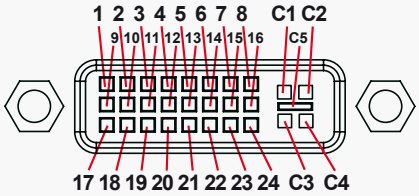

Pin 01	T.M.D.S. Data2 - (Digital - RED link 1)
Pin 02	T.M.D.S. Data2 + (Digital + RED link 1)
Pin 03	T.M.D.S. Data2/4 Shield
Pin 04	T.M.D.S. Data4 - (Digital - GREEN link 2)
Pin 05	T.M.D.S. Data4 + (Digital + GREEN link 2)
Pin 06	DDC Clock
Pin 07	DDC Data
Pin 08	Analog Vertical Sync (DVI-I only)
Pin 09	T.M.D.S. Data1 - (Digital - GREEN link 1)
Pin 10	T.M.D.S. Data1 + (Digital + GREEN link 1)
Pin 11	T.M.D.S. Data1/3 Shield
Pin 12	T.M.D.S. Data3 - (Digital - BLUE link 2)
Pin 13	T.M.D.S. Data3 + (Digital + BLUE link 2)
Pin 14	+5V Power (for standby mode)
Pin 15	Ground (for +5V and analog sync)
Pin 16	Hot Plug Detect
Pin 17	T.M.D.S. Data0 - (Digital - BLUE link 1) and digital sync.
Pin 18	T.M.D.S. Data0 + (Digital + BLUE link 1) and digital sync.
Pin 19	T.M.D.S. Data0/5 Shield
Pin 20	T.M.D.S. Data5 - (Digital - RED link 2)
Pin 21	T.M.D.S. Data5 + (Digital - RED link 2)
Pin 22	T.M.D.S. Clock Shield
Pin 23	T.M.D.S. Clock + (Digital clock + (Links 1 and 2)
Pin 24	T.M.D.S. Clock - (Digital clock - (Links 1 and 2)
Pin C1	Analog RED
Pin C2	Analog GREEN
Pin C3	Analog BLUE
Pin C4	Analog Horizontal Sync.
Pin C5	Analog Ground (return for RGB signals)

DDC = Display Data Channel /// T.M.D.S = Transition Minimized Differential Signal /// PIN C1,C2,C3,C4 = Only present on DVI-I connectors.
NOTE: Connector shows a DUAL LINK design, but some units may not support it. Only products with 1920x1200 or more in resolution require / support DUAL LINK.

Additional connector pinouts may be available in third party motherboard manuals, primarly for computers only. Please see manual/drivercd delivered with your product.

Pin Assignments - Common Connectors (Additional)

Pin Assignments - 9P Serial COM RS422



Pin 01 - N/C	Not Connected
Pin 02 - TX-	Transmit Data -
Pin 03 - RX+	Receive Data +
Pin 04 - N/C	Not Connected
Pin 05 - GND	Ground
Pin 06 - N/C	Not Connected
Pin 07 - TX+	Transmit Data +
Pin 08 - RX-	Receive Data -
Pin 09 - N/C	Not Connected

Pin Assignments - 9P Serial COM RS485



Pin 01 - N/C	Not Connected
Pin 02 - N/C	Not Connected
Pin 03 - DAT+	Data+
Pin 04 - N/C	Not Connected
Pin 05 - GND	Ground
Pin 06 - N/C	Not Connected
Pin 07 - N/C	Not Connected
Pin 08 - DAT-	Data-
Pin 09 - N/C	Not Connected

Note: These pin assignments applies for products with customer specified COM ports (pre-setup by the factory). These COM ports are set/configurable on the motherboard located inside the product. If the main cover of the product has to be unmounted and removed, the warranty will be void.

Basic Trouble-shooting

GENERAL ISSUES FOR TFT PANEL BASED PRODUCTS

Note: Applies for a range of various products. This is only meant as a general guide.

NO PICTURE / LED BEHAVIOUR:
If there is no light at all in the LED at the FRONT, check power cables. If the LED in front is green then check if the brightness knob is turned to the right (max brightness). If still no picture, check if there is a VGA signal on the External VGA connector. If you have a picture on the external VGA connector please look in BIOS documentation/chapter for correct display settings in BIOS. Lack of image is most likely to be caused by incorrect connection, lack of power, or wrong BIOS settings.

SCROLLING / UNSTABLE IMAGE:
Signal cable may not be completely connected to computer or TFT display. Check the pin assignments and signal timings of the display and your video card with respect to recommended timing and pin assignments. Make sure that the video card is compatible and that it is properly seated / installed on the computer.

DISPLAY AREA IS NOT CENTERED / SIZED CORRECTLY
Make sure that a supported video mode has been selected on the display, or on the video card / system. If it is impossible to position the image correctly, i.e. the image adjustment controls will not move the image far enough, then test it again using another graphics card for the PC system. This situation may occur with a custom graphics card that is not close to standard timings or if something is in the graphics line that may be affecting the signal, such as a signal splitter (please note that normally a signal splitter will not have any adverse effect). If it is impossible to change to the correct resolution/color depth, check if you have the right VGA driver installed in your system.

IMAGE APPEARANCE:
A faulty TFT panel can have black lines, pixel errors, failed sections, flickering or flashing image.
Incorrect graphics card refresh rate, resolution or interlaced mode will probably cause the image to be the wrong size, it may scroll, flicker badly or possibly even no image is present. Sparkling on the display may be a faulty TFT panel signal cable, and it needs service attention.

RGB Signal Only: Horizontal interference can usually be corrected by adjusting the PHASE (OSD menu).
Vertical interference can usually be corrected by adjusting the FREQUENCY (OSD menu).

DEW CONDENSATION BEHIND GLASS:
Note that this problem will not occur on bonded products. For non-bonded products, do the following:
Power on the TFT product and set brightness to 100%. Turn off any automatic screensavers on PC or similar. During minutes the dew will be gone. To speed up the process, use a fan heater for a reasonable time. Do not overheat the TFT product.

GENERAL ISSUES FOR COMPUTER BASED PRODUCTS

Note: Applies for a range of various products. This is only meant as a general guide.

CD-ROM FAILURE OR READ/DETECTION PROBLEMS:
If the product are operated/located in a area with extreme condensation, the CD/DVD drive may not work correctly due to condensation on the read head. Keep the product on for a while until it's reached normal operating temperature, and retry accessing discs. Otherwise, consider using USB memory sticks or alternative storage devices.

NO CD-ROM AVAILABLE ON YOUR PRODUCT FOR INSTALLING DRIVERS/SOFTWARE:
Please use USB memory sticks, USB Floppy drive, USB CD-Rom Drive or alternative storage devices to transfer/install software on CD-ROM-less units.

HATTELAND®
DISPLAY

Declaration of Conformity

We, manufacturer

Hatteland Display AS
Åmsosen, N-5578 Nedre Vats, Norway

declare under our sole responsibility that the
JH MMD, JH MMC, JH STD, JH MIL, HM NMD
HM MIL, HM CMD, HT STD, HD MMD & HT MMC
product ranges is in conformity with the following
standards in accordance with the EMC Directive.

Low Voltage Directive 2006/95/EC
EN 60950

EMC Directive 2004/108/EC
EN 55022 Class A
EN 55024

Signature:.....
Frode Grindheim
Vice President Product Management
Nedre Vats, Norway

Signature:.....
Arne Kristiansen
Site Manager - Test & Commission Division
Oslo, Norway

Date: 19 Mar 2009

CE

IND100237-1

Return Of Goods Information

Return of goods: (Applies not to warranty/normal service/repair of products)
Hatteland Display referenced as “manufacturer” in this document.

Before returning goods, please contact your system supplier before sending anything directly to manufacturer. When you return products after loan, test, evaulation or products subject for credit, you must ensure that all accessories received from our warehouse is returned. This applies to cables, powermodules and additional equipment except screws or similar, user manual, datasheets or other written paper documents. Furthermore, the product must not have any minor / medium or severe scratches, chemical spills or similar on the backcover, front frame or glass.

This is needed to credit the invoice 100%. Missing parts will not be subject for credit, and you will not get total credit for returned product. You will either be charged separately or the amount is withdrawn from the credit. If you decide to ship the missing items on the after hand, you will get 100% credit for that particular invoice or items received at manufacturer incoming goods control. Please contact our service/sales department if additional questions

Approved packaging methods/materials: (Applies to all shipments to manufacturer)
When returning goods, please make sure you surround the product with the following material, whenever possible: Original packaging from manufacturer, firm foam material, bubble wrap or lots of PadPack paper or Foam chips/polyester wrapped in sealed plastic bags. In any case, always use a solid cardboard box to surround everything.

Not approved packaging methods/materials are: Foam chips, expanded polyester, clothes, nothing, or too little, or anything that will crumble and get into the ventilation holes of products and cardboard boxes that are not suitable to secure the product during shipment.

Terms Of Sale And Delivery

1) APPLICATION
The terms of sale and delivery apply for Hatteland Display.

2) PRICE

a) The price is per each, if nothing else has been stated, VAT not included. Price is based on the prices from our suppliers, current custom rates, taxes, rate of exchange and international raw material prices. We reserve ourselves the rights to adjustments in case of alternation on the above mentioned.

b) Included in the price is the supplier's standard packing. In case of re-packing/smaller quantities we reserve ourselves the right to add an additional sum for warrantable packing according to CECC 0015 (Basic inspection for protection of electrostatic sensitive devices)

3) VALIDITY
If nothing else has been stated in our quotation, the offer is valid for 30 days from the date of quotation.

4) PACKAGE QUOTATION
A package quotation means that all the components offered, must be ordered by us. If one component or more are removed from the quotation, the prices given in the package quotation are not valid.

5) TERMS OF PAYMENT
Cash on delivery or payment in advance. Net granted for companies, schools and institutions only, according to agreement. In case of too late payment 1.5% interest/month will be charged. Seller has mortage rights in the goods delivered until the purchase price, additional interests and charges have been paid in full. Accepted bill is not considered as payment until it has been honoured in full.

6) TIME OF DELIVERY
The quoted time of delivery is based on information from our suppliers. We disclaim any responsibility for the consequences of any delay or cancellation from our suppliers. Belated delivery gives not solely the right for cancellation.

7) DELIVERY POINT OF TIME
Goods are considered delivered to customer when handed over to charterer.

8) FREIGHT / PACKING / FORWARDING FEE
Hatteland Display AS charge NOK 50,- in forwarding fee for orders below NOK 1000,-.
Freight charge according to expenses for orders above NOK 1000,-. VAT not included.

9) COMPLAINT
By receipt customer must check goods for obvious defects which have to be claimed within 8 days from receipt. Otherwise acceptance of complaint can not be counted on.

10) GUARANTEE / SERVICES
Time of guarantee is calculated from our date of shipment, and applies to the extent that we are covered by our supplier's guarantee regulations. The guarantee does no longer apply if:

I) there has been encroached upon the goods without seller's consent
II) terms of payment is not fulfilled
III) the goods have been damaged due to unskilled treatment
IV) components which are sensitive for static electricity have not been unpacked and treated in a secure way.

Minimum requirements: CECC 00015's standards for handling of such components. The guarantee does not include fair wear and tear.

11) RESPONSIBLITY
Seller undertake to deliver faultless and functional capable goods according to existing technical specifications. Seller disclaim responsibility for any damage or loss which directly or indirectly may be caused due to failure or defect with the delivered goods, if carelessness from the seller can be limited up to the cost of the goods. The supplier's responsibility for defects with the supplied goods do not include secondary damage or loss.

12) CANCELLATION / RETURN
Binding sales contract is concluded when we have confirmed customer's purchase order. Any disagreements in our order confirmation must be reported to seller within 6 days. The agreement can not be altered without our permission, after acceptance from our supplier. If goods are wanted to be returned, a Return No must be assigned from seller. Returned goods without a Return No will not be accepted. By return of stock listed goods, 20% return fee is charged. Returned goods are shipped on customer's account and risk.

13) LOAN, RENT and DEMO
When borrowing of goods for demo/test, the date of return must be added to the document. If no date has been stated, date of return is two weeks from the date of the document. Before return, seller must be contacted for a Return No (RTK). Goods which have been sold with an agreed right of return within stated terms, shall also have a Return No. The Return No must be obtained before the stated date of return. Returned goods without a Return No, or which have not been packed in original packing, will not be accepted.

14) LIMITATIONS
If any of our suppliers claim limited delivery terms towards us, our terms of delivery will be restricted according to those.

15) SOFTWARE
Sold or borrowed software is not allowed to be copied or spread in other ways, without a written permission.

16) RE-EXPORT
Goods delivered from seller may be subject to special rules of exportation in their supplier's native country. Buyer is responsible to obtain necessary permissions for further export/re-sale.

17) QUESTION IN DISPUTE
To settle any dispute the Karmsund Herredsrett is approved the legal venue.

INSTRUCTIONS FOR THE CONSIGNEE

1) CONTROL
Control the goods immediately by receipt. Examine the quantity towards the invoice/packinglist/shipping documents. Look for outward defects on the packing which may indicate damage on or loss of contents. Control the container and the seals for any defects.

2) SECURING EVIDENCE
When defects on the goods have been found, evidence must be secured, and seller must be informed. Call the transporter and point out the defects. Add a description of the defects on the goods receipt, the forwarder's copy of the way-bill or on the driving slip.

3) RESCUE
Bound the damage. Try to restrict the damage and the loss. Seller will compensate expences incurred due to reasonable security efforts in addition to damage and loss.

4) COMPLAINT
Write immediately a complaint to the transporter or his agent. Forward immediately the complaint to the transporter or his agent, and hold the transporter responsible for the defects. The complaint must be sent at the latest:

- for carriage by sea: within 3 days
- for overland / air transportation within 7 days

5) DOCUMENTATION
For any claims the following documentation is required, and must be forwared to the company or their agent: invoice, way-bill and/or bill of landing, and/or statement of arrival, inspection document, besides a copy of the letter of complaint to the transporter.

Pixel Defect Policy

PIXEL DEFECT POLICY

Dot-defects (Bright or dark spots on the panel)

Due to the effect that dot failures are part of the TFT technology such failure occurrence cannot be prevented basically. Even though dot defects usually occur during production process, new defects can appear within the lifespan of a TFT display. Neither the production at LCD-supplier nor the use of a LCD-Monitor after shipment can be influenced by Hatteland Display. Hence Hatteland Display cannot be made responsible for such dot failures. However Hatteland Display understand and accepts the responsibility towards the customers for the delivery of new displays, therefore accepts a limitation on dot defect's occurrence on new displays delivered to the customer.

PRINCIPLES

a. One pixel consists of 3 dots (Red, Green and Blue)

b. Dot defects are differentiated between:
- Bright dot defects: Spot on the panel appear as pixels or sub pixels that are always lit. Non-extinguishing dot.
- Dark dot defects: Spot on the panel appear as pixels or sub pixels that are always dark (off). Non-lightening dot.

c. Inspector observes the LCD from normal direction at a distance of 50cm above the worktable. Dark dots are counted under entire white screen. Bright dots are counted under entire black screen.

d. Dot failures within tolerances below do not qualify for warranty claims.

PIXEL DEFECT TOLERANCES

Bright dot	≤ 4 dots
Two adjacent bright dots *	≤ 2
Distance between 2 dot defects *	≥ 15mm
Dark dots	≤ 8
Total number of bright or dark dot defects. *	≤ 8

* 1 or 2 adjacent dot defects considered as 1 defect.

EXTRAORDINARY CIRCUMSTANCES

Possible cases which cannot be influenced either by customer or Hatteland Display.

Examples for extraordinary circumstances:
- Allocation from LCD-Supplier
- Outstanding high number of LCD-panels with bright dots but within LCD-suppliers Specification.
- Sharply increased demand by customer

In such cases a mutual agreement is inevitable.

Examples:
- Acceptance of bright dots in "non-critical" display areas.
- Acceptance of bright dots with defined color.

IND100351-1 - Rev 2 - Jul 2007

Notes

General Notes: (For all products)

- The unit is type approved according to EN60945 4th, 4.4, equipment category b) protected from the weather.

- Other type approvals applies for the different products.
  Please see **Testing & Approvals Overview** section in this manual for more information.

- Use of brightness and push buttons may inhibit visibility of information at night.

Note for ECDIS Systems

For ECDIS systems the brightness knob indication mark should be aligned directly with the indication mark located on the label. (See Physical Overview or Operation section in this manual)

Note for Documentation CD-ROM

The separate and full documentation for third party components (including options that are factory installed) are available on attached CD. The printed physical manual only covers specific information for Hatteland products, and not generally includes third party components.

Important BIOS Reset / No picture information

Please note that when performing a "Load Optimized Defaults" or "Load Fail-Safe Defaults" command in the BIOS menu, or if the internal ETX processor module was replaced, the picture on the TFT display will be black and the sync will be lost upon restart. No picture will be present on the MMC unit!

However, by using the standard RGB OUT DSUB connector connected to an external TFT Display or CRT Monitor, you will get a cloned picture from the MMC unit. Now you can correctly setup the display properties in the BIOS, which will re-enable the picture to display correctly on the MMC unit again. Please follow the procedure below for your MMC unit.

If you have no external display or monitor available, you can use the *"blind man"* routine:
1: Power on the MMC unit, while pressing <DEL> on the keyboard to enter BIOS setup.
2: Press the <DOWN ARROW> key 2 times, then press <ENTER>
3: Press the <DOWN ARROW> key 17 times, then press <ENTER>
4: Press the <DOWN ARROW> key 5 times (15 inch), 3 times (19/20 inch) or 6 times (23 inch) followed by pressing <ENTER>
5: Press <F10> on the keyboard, and press <ENTER>. The BIOS settings will be saved, and the unit will reset and boot up correctly with picture on the MMC Unit again.

BIOS Setup Menu Reference:

All versions of 15 Inch - JH 15T05MMC-xx (Pentium M)
- Choose "Advanced Chipset Features"
- Choose "Panel Number"
- Choose "1024x768 24bit SC"

All versions of 19 Inch - JH 19T02MMC-xx (Pentium M)
- Choose "Advanced Chipset Features"
- Choose "Panel Number"
- Choose "1280x1024 24bit SC"

All versions of 20 Inch - JH 20T05MMC-xx (Pentium M)
- Choose "Advanced Chipset Features"
- Choose "Panel Number"
- Choose "1280x1024 24bit SC"

All versions of 23 Inch - JH 23T02MMC-xx (Pentium M)
- Choose "Advanced Chipset Features"
- Choose "Panel Number"
- Choose "1600x1200 24bit SC"

When done, please refer to the BIOS manual if you need to change other options (available on separate/attached CD for your specific product).

Revision History

Rev.	By	Date	Notes
1	SE	02 Sep 04	First release internet version. Products covered, JH 15T05 and JH 19T02
2	SE	26 Oct 04	Added pin assignments for RS422 and RS485
3	SE	08 Nov 04	Updated important security information regarding the Compact Flash Slot.
4	SE	04 Mar 05	Updated 19 Inch specification and Testing & Type Approval section. Added JH 23T02 MMC. Added Bracket Mounting Precautions and drawings.
5	SE	17 Mar 05	Updated Testing and Type Approval Section.
6	SE	21 Jun 05	Updated specifications.
7	SE	17 Aug 05	Updated Physical Connections Section.
8	SE	24 Aug 05	Added technical drawings for JH 19T02 MMC with bracket.
9	SE	7 Sep 05	Updated specifications.
10	SE	18 Nov 05	Updated specifications.
11/12	SE	22 May 06	Updated frontpage/design, updated Testing and Type Approvals section.
13	SE	22 Aug 06	Type approval page removed, and information merged with the respective product specification pages.
14	SE	15 Sep 06	Updated specifications. Changed 5400 rpm to 4200 rpm on HD speed.
15	SE	02 Oct 06	Added JH 10T08 MMC
16	SE	02 Jan 07	Updated testing and type approvals for various products. Updated specifications for all MMC products. Available processor range now up to 2.0 GHZ.
17	SE	22 Jan 07	Updated information regarding the HDD LED in user controls & specifications. Applicable for 10” and 23” models.
18	SE	01 Feb 07	Updated testing and type approvals.
19	SE	09 Mar 07	Updated specifications regarding resolutions.
20	SE	13 Jul 07	Updated testing and type approvals for 10” and 23” models. Added Technical Drawing of JH 15T05 MMC with brackets Added Sun Visor and adapter frames technical drawings for various models. General revision of text elements.
21	SE TØ	19 Oct 07	Revised installation chapter. Added “Pixel Defect Policy” to the Appendix chapter.
22	SE	01 Apr 08	Revised Contents of Package chapter (touch screen cd and power cables). Revised touch screen chapter. Revised product labels chapter. Revised specifications where needed. Revised company profile and updated company logo throughout the manual. Added technical drawing for 15” TFT to 17” CRT Adapter frame. Added technical drawing for 19” bracket.
23	SE	14 May 08	Revised specifications, removed wrong IP rating.
24	SE	08 Oct 08	Revised specifications, technical drawings and user manual in reference to PCN: http://www.hatteland-display.com/mails/30_2008_pcn.html Added inches to specifications and all technical drawings. Available processor now up to 1.8GHz and removal of HDD LED and Reset Button Aperture. Revised Physical Overview Chapter
25	SE	17 Dec 2008	Updated testing and type approvals for various products. Revised drawings for JH 10T08 MMC regarding power mounting bracket.
26	SE GV	26 Mar 2009	Revised specifications Added info about Serial Remote Control Interface (SCOM) Fixed corrupted layout in the Connections chapter.
27	SE KG	07 May 2009	Revised specifications for 10 inch. Removed JH TBR reference.